


October 12, 1995
Software Version 1.0

PROGRAMMING WORK SHEETS



Table of Contents

Hook-Up Diagram	ii
System Programming	1
Telephone Access Programming	2
Automation Schedules	3
Automation Items	7
Automation Item Pulse Timers	39
Label Programming	40
Appendix 1: X-10 House Code and Unit Numbers	56
Appendix 2: Word Library	57
For The Record	58

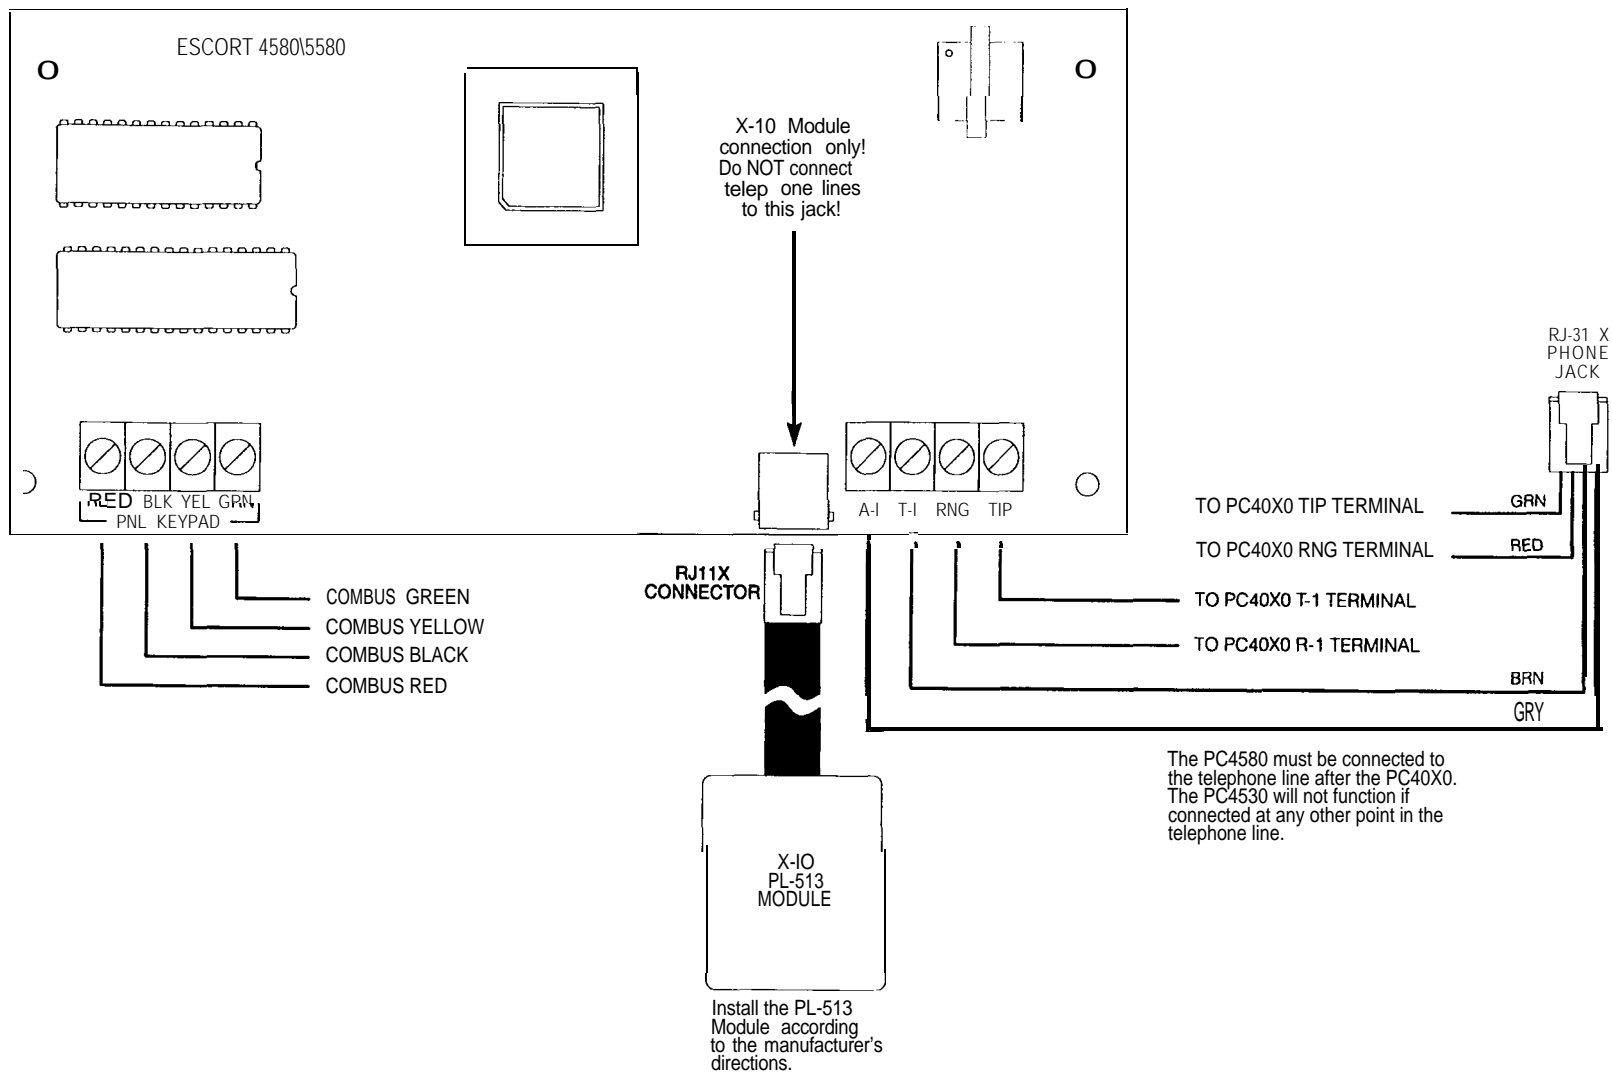

System Programming

001 Service Code

Default

4 5 8 0

002 First System Option Code

Default

OFF

Option

01

ON

Home Automation enabled

OFF

Home Automation disabled

OFF

02

[*][5] requires an Access Code

[*][5] does not require an Access Code

003 Status Prompt Day Mask

Default

ON

Option

01

ON

"Warning Bypass On" prompt enabled

OFF

Disabled

ON

02

"System Open Zone X" prompt enabled

Disabled

ON

03

"Alarms in Memory" prompt enabled

Disabled

ON

04

"AC Trouble" prompt enabled

Disabled

ON

05

"Phone Line Trouble" prompt enabled

Disabled

ON

06

"Low Battery on Zone X" prompt enabled

Disabled

ON

07

"Loss of Clock Trouble" prompt enabled

Disabled

ON

08

"System Fault, Service Required" prompt enabled

Disabled

ON

09

"For More Options, Press Star" prompt enabled

Disabled

ON

10

"System On Without Entry" prompt enabled

Disabled

ON

11

"Automation Service Required" prompt enabled

Disabled

ON

12

"Zone Tamper" prompt enabled

Disabled

ON

13

"Zone Fault" prompt enabled

Disabled

004 [*] Function Prompt Day Mask

Default

ON

Option

01

ON

"For Zone Bypassing" prompt enabled

OFF

Disabled

ON

02

"For Alarm Memory" prompt enabled

Disabled

ON

03

"For Sensor Reset" prompt enabled

Disabled

ON

04

"For Automatic Control" prompt enabled

Disabled

ON

05

"For Special Functions" prompt enabled

Disabled

ON

06

"For Door Strike" prompt enabled

Disabled

ON

07

"For Arming Without Entry" prompt enabled

Disabled

ON

08

"For Quick Arming" prompt enabled

Disabled

ON

09

"For Quick Exit" prompt enabled

Disabled

ON

10

"To Arm Interior Zones" prompt enabled

Disabled

005 Local Programming Lockout Counter

Default

0 0 0

006 Local Programming Lockout Duration

Default

0 0 0

007 Number of Home Automation Transmissions

Default

0 0 1

Valid entries are 001 to 255

Section 07 is not supported by the DLS-1 v5.6 or earlier Downloading Software.

Telephone Access Programming

020 Local and Remote Telephone Access Code

Default

Enter a 3-digit code using the numbers 0 through 9, and the signs [#] and [*]. *Avoid Codes that coincide with local telephone company 3-digit telephone numbers and services.*

021 Telephone Access Options

Default

Option

ON

OFF

01

Remote Access Enabled

Remote Access Disabled

02

PC40XX code req'd for Local Access

No code req'd for Partition Access

Automation Schedules

030 Schedule 1 ON Time

Default

9 9 9 9

031 Schedule 1 OFF Time

Default

9 9 9 9

032 Schedule 1 Day Mask

	01	02	03	04	05	06	07
Defaults	ON	ON	ON	ON	ON	ON	ON

Option	ON	OFF
--------	----	-----

01	Sunday ON	Sunday OFF
02	Monday ON	Monday OFF
03	Tuesday ON	Tuesday OFF
04	Wednesday ON	Wednesday OFF
05	Thursday ON	Thursday OFF
06	Friday ON	Friday OFF
07	Saturday ON	Saturday OFF

033 Schedule 2 ON Time

Default

9 9 9 9

034 Schedule 2 OFF Time

Default

9 9 9 9

035 Schedule 2 Day Mask

	01	02	03	04	05	06	07
Defaults	ON	ON	ON	ON	ON	ON	ON

036 Schedule 3 ON Time

Default

9 9 9 9

037 Schedule 3 OFF Time

Default

9 9 9 9

038 Schedule 3 Day Mask

	01	02	03	04	05	06	07
Defaults	ON	ON	ON	ON	ON	ON	ON

039 Schedule 4 ON Time

Default

9 9 9 9

040 Schedule 4 OFF Time

Default

9 9 9 9

041 Schedule 4 Day Mask

	01	02	03	04	05	06	07
Defaults	ON	ON	ON	ON	ON	ON	ON
	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

042 Schedule 5 ON Time

Default

<input type="text" value="9"/>	<input type="text" value="9"/>	<input type="text" value="9"/>	<input type="text" value="9"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
--------------------------------	--------------------------------	--------------------------------	--------------------------------	----------------------	----------------------	----------------------	----------------------

043 Schedule 5 OFF Time

Default

<input type="text" value="9"/>	<input type="text" value="9"/>	<input type="text" value="9"/>	<input type="text" value="9"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
--------------------------------	--------------------------------	--------------------------------	--------------------------------	----------------------	----------------------	----------------------	----------------------

044 Schedule 5 Day Mask

	01	02	03	04	05	06	07
Defaults	ON	ON	ON	ON	ON	ON	ON
	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

045 Schedule 6 ON Time

Default

<input type="text" value="9"/>	<input type="text" value="9"/>	<input type="text" value="9"/>	<input type="text" value="9"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
--------------------------------	--------------------------------	--------------------------------	--------------------------------	----------------------	----------------------	----------------------	----------------------

046 Schedule 6 OFF Time

Default

<input type="text" value="9"/>	<input type="text" value="9"/>	<input type="text" value="9"/>	<input type="text" value="9"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
--------------------------------	--------------------------------	--------------------------------	--------------------------------	----------------------	----------------------	----------------------	----------------------

047 Schedule 6 Day Mask

	01	02	03	04	05	06	07
Defaults	ON	ON	ON	ON	ON	ON	ON
	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

048 Schedule 7 ON Time

Default

<input type="text" value="9"/>	<input type="text" value="9"/>	<input type="text" value="9"/>	<input type="text" value="9"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
--------------------------------	--------------------------------	--------------------------------	--------------------------------	----------------------	----------------------	----------------------	----------------------

049 Schedule 7 OFF Time

Default

<input type="text" value="9"/>	<input type="text" value="9"/>	<input type="text" value="9"/>	<input type="text" value="9"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
--------------------------------	--------------------------------	--------------------------------	--------------------------------	----------------------	----------------------	----------------------	----------------------

050 Schedule 7 Day Mask

	01	02	03	04	05	06	07
Defaults	ON	ON	ON	ON	ON	ON	ON
	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

051 Schedule 8 ON Time

Default

<input type="text" value="9"/>	<input type="text" value="9"/>	<input type="text" value="9"/>	<input type="text" value="9"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
--------------------------------	--------------------------------	--------------------------------	--------------------------------	----------------------	----------------------	----------------------	----------------------

052 Schedule 8 OFF Time

Default

<input type="text" value="9"/>	<input type="text" value="9"/>	<input type="text" value="9"/>	<input type="text" value="9"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
--------------------------------	--------------------------------	--------------------------------	--------------------------------	----------------------	----------------------	----------------------	----------------------

053 Schedule 8 Day Mask

	01	02	03	04	05	06	07
Defaults	ON	ON	ON	ON	ON	ON	ON
	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

054 Schedule 9 ON Time

Default

9	9	9	9				
---	---	---	---	--	--	--	--

055 Schedule 9 OFF Time

Default

9	9	9	9				
---	---	---	---	--	--	--	--

056 Schedule 9 Day Mask

	01	02	03	04	05	06	07							
Defaults	ON	ON	ON	ON	ON	ON	ON							
	<table border="1"><tr><td></td></tr></table>		<table border="1"><tr><td></td></tr></table>		<table border="1"><tr><td></td></tr></table>		<table border="1"><tr><td></td></tr></table>		<table border="1"><tr><td></td></tr></table>		<table border="1"><tr><td></td></tr></table>		<table border="1"><tr><td></td></tr></table>	

057 Schedule 10 ON Time

Default

9	9	9	9				
---	---	---	---	--	--	--	--

058 Schedule 10 OFF Time

Default

9	9	9	9				
---	---	---	---	--	--	--	--

059 Schedule 10 Day Mask

	01	02	03	04	05	06	07							
Defaults	ON	ON	ON	ON	ON	ON	ON							
	<table border="1"><tr><td></td></tr></table>		<table border="1"><tr><td></td></tr></table>		<table border="1"><tr><td></td></tr></table>		<table border="1"><tr><td></td></tr></table>		<table border="1"><tr><td></td></tr></table>		<table border="1"><tr><td></td></tr></table>		<table border="1"><tr><td></td></tr></table>	

060 Schedule 11 ON Time

Default

9	9	9	9				
---	---	---	---	--	--	--	--

061 Schedule 11 OFF Time

Default

9	9	9	9				
---	---	---	---	--	--	--	--

062 Schedule 11 Day Mask

	01	02	03	04	05	06	07							
Defaults	ON	ON	ON	ON	ON	ON	ON							
	<table border="1"><tr><td></td></tr></table>		<table border="1"><tr><td></td></tr></table>		<table border="1"><tr><td></td></tr></table>		<table border="1"><tr><td></td></tr></table>		<table border="1"><tr><td></td></tr></table>		<table border="1"><tr><td></td></tr></table>		<table border="1"><tr><td></td></tr></table>	

063 Schedule 12 ON Time

Default

9	9	9	9				
---	---	---	---	--	--	--	--

064 Schedule 12 OFF Time

Default

9	9	9	9				
---	---	---	---	--	--	--	--

065 Schedule 12 Day Mask

	01	02	03	04	05	06	07							
Defaults	ON	ON	ON	ON	ON	ON	ON							
	<table border="1"><tr><td></td></tr></table>		<table border="1"><tr><td></td></tr></table>		<table border="1"><tr><td></td></tr></table>		<table border="1"><tr><td></td></tr></table>		<table border="1"><tr><td></td></tr></table>		<table border="1"><tr><td></td></tr></table>		<table border="1"><tr><td></td></tr></table>	

066 Schedule 13 ON Time

Default

9	9	9	9				
---	---	---	---	--	--	--	--

067 Schedule 13 OFF Time

Default

9 9 9 9 _____

068 Schedule 13 Day Mask

	01	02	03	04	05	06	07
Defaults	ON	ON	ON	ON	ON	ON	ON
	_____	_____	_____	_____	_____	_____	_____

069 Schedule 14 ON Time

Default

9 9 9 9 _____

070 Schedule 14 OFF Time

Default

9 9 9 9 _____

071 Schedule 14 Day Mask

	01	02	03	04	05	06	07
Defaults	ON	ON	ON	ON	ON	ON	ON
	_____	_____	_____	_____	_____	_____	_____

072 Schedule 15 ON Time

Default

9 9 9 9 _____

073 Schedule 15 OFF Time

Default

9 9 9 9 _____

074 Schedule 15 Day Mask

	01	02	03	04	05	06	07
Defaults	ON	ON	ON	ON	ON	ON	ON
	_____	_____	_____	_____	_____	_____	_____

075 Schedule 16 ON Time

Default

9 9 9 9 _____

076 Schedule 16 OFF Time

Default

9 9 9 9 _____

077 Schedule 16 Day Mask

	01	02	03	04	05	06	07
Defaults	ON	ON	ON	ON	ON	ON	ON
	_____	_____	_____	_____	_____	_____	_____

Automation Items

130 Automation Item 1: House Code and Unit Number

Default

0 0 0

131 Automation Item 1: Miscellaneous Options

Default	Option	ON	OFF
<input type="checkbox"/> OFF	<input type="checkbox"/> 01	Automation Item enabled	Automation Item disabled
<input type="checkbox"/> ON	<input type="checkbox"/> 02	User Controlled ON/OFF	Not user controlled
<input type="checkbox"/> OFF	<input type="checkbox"/> 03	Included in Global ON/OFF Command	Not included in Global ON/OFF Command
<input type="checkbox"/> OFF	<input type="checkbox"/> 04	Dimming Enabled	Dimming Disabled
<input type="checkbox"/> OFF	<input type="checkbox"/> 05	Follows Schedule ON/OFF Output Condition Always	Follows Schedule ON/OFF Output Condition only when Mode is ON
<input type="checkbox"/> ON	<input type="checkbox"/> 06	Item is ON steady when active	Item activates for programmed time
<input type="checkbox"/> ON	<input type="checkbox"/> 07	Item prompt: "ON/OFF"	Prompt is not "ON/OFF"
<input type="checkbox"/> OFF	<input type="checkbox"/> 08	Item prompt: "OPEN/CLOSED"	Prompt is not "OPEN/CLOSED"
<input type="checkbox"/> OFF	<input type="checkbox"/> 09	Item prompt: "Setback ON/Setback OFF"	Prompt is not "Setback ON/Setback OFF"

NOTE: Only ONE of Options 07, 08 or 09 may be selected.

132 Automation Item 1: Schedule Assignment

Follows Schedule

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

133 Automation Item 1: Mode Assignment

Follows Schedule

	1	2	3	4	5	6	7	8
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

134 Automation Item 1: Timer / Output Condition

Enter one 2-digit number to determine how the Automation Item will operate.

Default

0 0

Option	Operation
00	Manual user control only
01	Alarm System Output Only
02	Schedule Only
03	Schedule or Alarm System Output
04	Schedule and Alarm System Output

135 Automation Item 2: House Code and Unit Number

Default

0	0	0			
---	---	---	--	--	--

136 Automation Item 2: Miscellaneous Options

Default		Option	ON	OFF
<u>OFF</u>	<input type="checkbox"/>	01	Automation Item enabled	Automation Item disabled
<u>ON</u>	<input type="checkbox"/>	02	User Controlled ON/OFF	Not user controlled
<u>OFF</u>	<input type="checkbox"/>	03	Included in Global ON/OFF Command	Not included in Global ON/OFF Command
<u>OFF</u>	<input type="checkbox"/>	04	Dimming Enabled	Dimming Disabled
<u>OFF</u>	<input type="checkbox"/>	05	Follows Schedule ON/OFF Output Condition Always	Follows Schedule ON/OFF Output Condition only when Mode is ON
<u>ON</u>	<input type="checkbox"/>	06	Item is ON steady when active	Item activates for programmed time
<u>ON</u>	<input type="checkbox"/>	07	Item prompt: "ON/OFF"	Prompt is not "ON/OFF"
<u>OFF</u>	<input type="checkbox"/>	08	Item prompt: "OPEN/CLOSED"	Prompt is not "OPEN/CLOSED"
<u>OFF</u>	<input type="checkbox"/>	09	Item prompt: "Setback ON/Setback OFF"	Prompt is not "Setback ON/Setback OFF"

NOTE: Only ONE of Options 07, 08 or 09 may be selected.**137 Automation Item 2: Schedule Assignment**

	Follows Schedule																																	
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16																		
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF																		
	<table><tr><td></td></tr></table>		<table><tr><td></td></tr></table>		<table><tr><td></td></tr></table>		<table><tr><td></td></tr></table>		<table><tr><td></td></tr></table>		<table><tr><td></td></tr></table>		<table><tr><td></td></tr></table>		<table><tr><td></td></tr></table>		<table><tr><td></td></tr></table>		<table><tr><td></td></tr></table>		<table><tr><td></td></tr></table>		<table><tr><td></td></tr></table>		<table><tr><td></td></tr></table>		<table><tr><td></td></tr></table>		<table><tr><td></td></tr></table>		<table><tr><td></td></tr></table>		<table><tr><td></td></tr></table>	

138 Automation Item 2: Mode Assignment

	Follows Schedule															
	1	2	3	4	5	6	7	8								
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF								
	<table><tr><td></td></tr></table>		<table><tr><td></td></tr></table>		<table><tr><td></td></tr></table>		<table><tr><td></td></tr></table>		<table><tr><td></td></tr></table>		<table><tr><td></td></tr></table>		<table><tr><td></td></tr></table>		<table><tr><td></td></tr></table>	

139 Automation Item 2: Timer / Output Condition

Enter one 2-digit number to determine how the Automation Item will operate.

Default

0	0		
---	---	--	--

Option	Operation
00	Manual user control only
01	Alarm System Output Only
02	Schedule Only
03	Schedule or Alarm System Output
04	Schedule and Alarm System Output

140 Automation Item 3: House Code and Unit Number

Default

0 0 0 _ _ _

141 Automation Item 3: Miscellaneous Options

Default		Option	ON	OFF
<input type="checkbox"/> OFF	<input type="checkbox"/>	01	Automation Item enabled	Automation Item disabled
<input type="checkbox"/> ON	<input type="checkbox"/>	02	User Controlled ON/OFF	Not user controlled
<input type="checkbox"/> OFF	<input type="checkbox"/>	03	Included in Global ON/OFF Command	Not included in Global ON/OFF Command
<input type="checkbox"/> OFF	<input type="checkbox"/>	04	Dimming Enabled	Dimming Disabled
<input type="checkbox"/> OFF	<input type="checkbox"/>	05	Follows Schedule ON/OFF Output Condition Always	Follows Schedule ON/OFF Output Condition only when Mode is ON
<input type="checkbox"/> ON	<input type="checkbox"/>	06	Item is ON steady when active	Item activates for programmed time
<input type="checkbox"/> ON	<input type="checkbox"/>	07	Item prompt: "ON/OFF"	Prompt is not "ON/OFF"
<input type="checkbox"/> OFF	<input type="checkbox"/>	08	Item prompt: "OPEN/CLOSED"	Prompt is not "OPEN/CLOSED"
<input type="checkbox"/> OFF	<input type="checkbox"/>	09	Item prompt: "Setback ON/Setback OFF"	Prompt is not "Setback ON/Setback OFF"

NOTE: Only ONE of Options 07, 08 or 09 may be selected.

142 Automation Item 3: Schedule Assignment

Follows Schedule

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

143 Automation Item 3: Mode Assignment

Follows Schedule

	1	2	3	4	5	6	7	8
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

144 Automation Item 3: Timer / Output Condition

Enter one 2-digit number to determine how the Automation Item will operate.

Default

0 0 _ _

Option	Operation
00	Manual user control only
01	Alarm System Output Only
02	Schedule Only
03	Schedule or Alarm System Output
04	Schedule and Alarm System Output

145 Automation Item 4: House Code and Unit Number

Default

0 0 0

146 Automation Item 4: Miscellaneous Options

Default	Option	ON	OFF
<input type="checkbox"/> OFF	<input type="checkbox"/>	01 Automation Item enabled	Automation Item disabled
<input type="checkbox"/> ON	<input type="checkbox"/>	02 User Controlled ON/OFF	Not user controlled
<input type="checkbox"/> OFF	<input type="checkbox"/>	03 Included in Global ON/OFF Command	Not included in Global ON/OFF Command
<input type="checkbox"/> OFF	<input type="checkbox"/>	04 Dimming Enabled	Dimming Disabled
<input type="checkbox"/> OFF	<input type="checkbox"/>	05 Follows Schedule ON/OFF Output Condition Always	Follows Schedule ON/OFF Output Condition only when Mode is ON
<input type="checkbox"/> ON	<input type="checkbox"/>	06 Item is ON steady when active	Item activates for programmed time
<input type="checkbox"/> ON	<input type="checkbox"/>	07 Item prompt: "ON/OFF"	Prompt is not "ON/OFF"
<input type="checkbox"/> OFF	<input type="checkbox"/>	08 Item prompt: "OPEN/CLOSED"	Prompt is not "OPEN/CLOSED"
<input type="checkbox"/> OFF	<input type="checkbox"/>	09 Item prompt: "Setback ON/Setback OFF"	Prompt is not "Setback ON/Setback OFF"

NOTE: Only ONE of Options 07, 08 or 09 may be selected.

147 Automation Item 4: Schedule Assignment

Follows Schedule

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

148 Automation Item 4: Mode Assignment

Follows Schedule

	1	2	3	4	5	6	7	8
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

149 Automation Item 4: Timer / Output Condition

Enter one 2-digit number to determine how the Automation Item will operate.

Default

0 0

Option	Operation
00	Manual user control only
01	Alarm System Output Only
02	Schedule Only
03	Schedule or Alarm System Output
04	Schedule and Alarm System Output

150 Automation Item 5: House Code and Unit Number

Default

0 0 0

151 Automation Item 5: Miscellaneous Options

Default		Option	ON	OFF
<u>OFF</u>	<u> </u>	01	Automation Item enabled	Automation Item disabled
<u>ON</u>	<u> </u>	02	User Controlled ON/OFF	Not user controlled
<u>OFF</u>	<u> </u>	03	Included in Global ON/OFF Command	Not included in Global ON/OFF Command
<u>OFF</u>	<u> </u>	04	Dimming Enabled	Dimming Disabled
<u>OFF</u>	<u> </u>	05	Follows Schedule ON/OFF Output Condition Always	Follows Schedule ON/OFF Output Condition only when Mode is ON
<u>ON</u>	<u> </u>	06	Item is ON steady when active	Item activates for programmed time
<u>ON</u>	<u> </u>	07	Item prompt: "ON/OFF"	Prompt is not "ON/OFF"
<u>OFF</u>	<u> </u>	08	Item prompt: "OPEN/CLOSED"	Prompt is not "OPEN/CLOSED"
<u>OFF</u>	<u> </u>	09	Item prompt: "Setback ON/Setback OFF"	Prompt is not "Setback ON/Setback OFF"

NOTE: Only ONE of Options 07, 08 or 09 may be selected.

152 Automation Item 5: Schedule Assignment

Follows Schedule

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>

153 Automation Item 5: Mode Assignment

Follows Schedule

	1	2	3	4	5	6	7	8
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>

154 Automation Item 5: Timer / Output Condition

Enter one 2-digit number to determine how the Automation Item will operate.

Default

0 0

Option	Operation
00	Manual user control only
01	Alarm System Output Only
02	Schedule Only
03	Schedule or Alarm System Output
04	Schedule and Alarm System Output

155 Automation Item 6: House Code and Unit Number

Default

0 0 0

156 Automation Item 6: Miscellaneous Options

Default		Option	ON	OFF
<u>OFF</u>	<u> </u>	01	Automation Item enabled	Automation Item disabled
<u>ON</u>	<u> </u>	02	User Controlled ON/OFF	Not user controlled
<u>OFF</u>	<u> </u>	03	Included in Global ON/OFF Command	Not included in Global ON/OFF Command
<u>OFF</u>	<u> </u>	04	Dimming Enabled	Dimming Disabled
<u>OFF</u>	<u> </u>	05	Follows Schedule ON/OFF Output Condition Always	Follows Schedule ON/OFF Output Condition only when Mode is ON
<u>ON</u>	<u> </u>	06	Item is ON steady when active	Item activates for programmed time
<u>ON</u>	<u> </u>	07	Item prompt: "ON/OFF"	Prompt is not "ON/OFF"
<u>OFF</u>	<u> </u>	08	Item prompt: "OPEN/CLOSED"	Prompt is not "OPEN/CLOSED"
<u>OFF</u>	<u> </u>	09	Item prompt: "Setback ON/Setback OFF"	Prompt is not "Setback ON/Setback OFF"

NOTE: Only ONE of Options 07, 08 or 09 may be selected.

157 Automation Item 6: Schedule Assignment

Follows Schedule

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>

158 Automation Item 6: Mode Assignment

Follows Schedule

	1	2	3	4	5	6	7	8
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>

159 Automation Item 6: Timer / Output Condition

Enter one 2-digit number to determine how the Automation Item will operate.

Default

0 0

Option	Operation
00	Manual user control only
01	Alarm System Output Only
02	Schedule Only
03	Schedule or Alarm System Output
04	Schedule and Alarm System Output

160 Automation Item 7: House Code and Unit Number

Default

0 0 0 _ _ _

161 Automation Item 7: Miscellaneous Options

Default		Option	ON	OFF
OFF	<input type="checkbox"/>	01	Automation Item enabled	Automation Item disabled
ON	<input type="checkbox"/>	02	User Controlled ON/OFF	Not user controlled
OFF	<input type="checkbox"/>	03	Included in Global ON/OFF Command	Not included in Global ON/OFF Command
OFF	<input type="checkbox"/>	04	Dimming Enabled	Dimming Disabled
OFF	<input type="checkbox"/>	05	Follows Schedule ON/OFF Output Condition Always	Follows Schedule ON/OFF Output Condition only when Mode is ON
ON	<input type="checkbox"/>	06	Item is ON steady when active	Item activates for programmed time
ON	<input type="checkbox"/>	07	Item prompt: "ON/OFF"	Prompt is not "ON/OFF"
OFF	<input type="checkbox"/>	08	Item prompt: "OPEN/CLOSED"	Prompt is not "OPEN/CLOSED"
OFF	<input type="checkbox"/>	09	Item prompt: "Setback ON/Setback OFF"	Prompt is not "Setback ON/Setback OFF"

NOTE: Only ONE of Options 07, 08 or 09 may be selected.

162 Automation Item 7: Schedule Assignment

Follows Schedule

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

163 Automation Item 7: Mode Assignment

Follows Schedule

	1	2	3	4	5	6	7	8
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

164 Automation Item 7: Timer / Output Condition

Enter one 2-digit number to determine how the Automation Item will operate.

Default

0 0 _ _

Option	Operation
00	Manual user control only
01	Alarm System Output Only
02	Schedule Only
03	Schedule or Alarm System Output
04	Schedule and Alarm System Output

165 Automation Item 8: House Code and Unit Number

Default

0 0 0

166 Automation Item 8: Miscellaneous Options

Default		Option	ON	OFF
<u>OFF</u>	<u> </u>	01	Automation Item enabled	Automation Item disabled
<u>ON</u>	<u> </u>	02	User Controlled ON/OFF	Not user controlled
<u>OFF</u>	<u> </u>	03	Included in Global ON/OFF Command	Not included in Global ON/OFF Command
<u>OFF</u>	<u> </u>	04	Dimming Enabled	Dimming Disabled
<u>OFF</u>	<u> </u>	05	Follows Schedule ON/OFF Output Condition Always	Follows Schedule ON/OFF Output Condition only when Mode is ON
<u>ON</u>	<u> </u>	06	Item is ON steady when active	Item activates for programmed time
<u>ON</u>	<u> </u>	07	Item prompt: "ON/OFF"	Prompt is not "ON/OFF"
<u>OFF</u>	<u> </u>	08	Item prompt: "OPEN/CLOSED"	Prompt is not "OPEN/CLOSED"
<u>OFF</u>	<u> </u>	09	Item prompt: "Setback ON/Setback OFF"	Prompt is not "Setback ON/Setback OFF"

NOTE: Only ONE of Options 07, 08 or 09 may be selected.

167 Automation Item 8: Schedule Assignment

Follows Schedule

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>

168 Automation Item 8: Mode Assignment

Follows Schedule

	1	2	3	4	5	6	7	8
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>

169 Automation Item 8: Timer / Output Condition

Enter one 2-digit number to determine how the Automation Item will operate.

Default

0 0

Option	Operation
00	Manual user control only
01	Alarm System Output Only
02	Schedule Only
03	Schedule or Alarm System Output
04	Schedule and Alarm System Output

170 Automation Item 9: House Code and Unit Number

Default

0 0 0

171 Automation Item 9: Miscellaneous Options

Default	Option	ON	OFF
<input type="checkbox"/> OFF	01	Automation Item enabled	Automation Item disabled
<input type="checkbox"/> ON	02	User Controlled ON/OFF	Not user controlled
<input type="checkbox"/> OFF	03	Included in Global ON/OFF Command	Not included in Global ON/OFF Command
<input type="checkbox"/> OFF	04	Dimming Enabled	Dimming Disabled
<input type="checkbox"/> OFF	05	Follows Schedule ON/OFF Output Condition Always	Follows Schedule ON/OFF Output Condition only when Mode is ON
<input type="checkbox"/> ON	06	Item is ON steady when active	Item activates for programmed time
<input type="checkbox"/> ON	07	Item prompt: "ON/OFF"	Prompt is not "ON/OFF"
<input type="checkbox"/> OFF	08	Item prompt: "OPEN/CLOSED"	Prompt is not "OPEN/CLOSED"
<input type="checkbox"/> OFF	09	Item prompt: "Setback ON/Setback OFF"	Prompt is not "Setback ON/Setback OFF"

NOTE: Only ONE of Options 07, 08 or 09 may be selected.

172 Automation Item 9: Schedule Assignment

Follows Schedule

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

173 Automation Item 9: Mode Assignment

Follows Schedule

	1	2	3	4	5	6	7	8
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

174 Automation Item 9: Timer / Output Condition

Enter one 2-digit number to determine how the Automation Item will operate.

Default

0 0

Option	Operation
00	Manual user control only
01	Alarm System Output Only
02	Schedule Only
03	Schedule or Alarm System Output
04	Schedule and Alarm System Output

175 Automation Item 10: House Code and Unit Number

Default

0 0 0

176 Automation Item 10: Miscellaneous Options

Default		Option	ON	OFF
<u>OFF</u>	<u> </u>	01	Automation Item enabled	Automation Item disabled
<u>ON</u>	<u> </u>	02	User Controlled ON/OFF	Not user controlled
<u>OFF</u>	<u> </u>	03	Included in Global ON/OFF Command	Not included in Global ON/OFF Command
<u>OFF</u>	<u> </u>	04	Dimming Enabled	Dimming Disabled
<u>OFF</u>	<u> </u>	05	Follows Schedule ON/OFF Output Condition Always	Follows Schedule ON/OFF Output Condition only when Mode is ON
<u>ON</u>	<u> </u>	06	Item is ON steady when active	Item activates for programmed time
<u>ON</u>	<u> </u>	07	Item prompt: "ON/OFF"	Prompt is not "ON/OFF"
<u>OFF</u>	<u> </u>	08	Item prompt: "OPEN/CLOSED"	Prompt is not "OPEN/CLOSED"
<u>OFF</u>	<u> </u>	09	Item prompt: "Setback ON/Setback OFF"	Prompt is not "Setback ON/Setback OFF"

NOTE: Only ONE of Options 07, 08 or 09 may be selected.

177 Automation Item 10: Schedule Assignment

Follows Schedule

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>

178 Automation Item 10: Mode Assignment

Follows Schedule

	1	2	3	4	5	6	7	8
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>

179 Automation Item 10: Timer / Output Condition

Enter one 2-digit number to determine how the Automation Item will operate.

Default

0 0

Option	Operation
00	Manual user control only
01	Alarm System Output Only
02	Schedule Only
03	Schedule or Alarm System Output
04	Schedule and Alarm System Output

180 Automation Item 11: House Code and Unit Number

Default

0 0 0

181 Automation Item 11: Miscellaneous Options

Default	Option	ON	OFF
<input type="checkbox"/> OFF	01	Automation Item enabled	Automation Item disabled
<input type="checkbox"/> ON	02	User Controlled ON/OFF	Not user controlled
<input type="checkbox"/> OFF	03	Included in Global ON/OFF Command	Not included in Global ON/OFF Command
<input type="checkbox"/> OFF	04	Dimming Enabled	Dimming Disabled
<input type="checkbox"/> OFF	05	Follows Schedule ON/OFF Output Condition Always	Follows Schedule ON/OFF Output Condition only when Mode is ON
<input type="checkbox"/> ON	06	Item is ON steady when active	Item activates for programmed time
<input type="checkbox"/> ON	07	Item prompt: "ON/OFF"	Prompt is not "ON/OFF"
<input type="checkbox"/> OFF	08	Item prompt: "OPEN/CLOSED"	Prompt is not "OPEN/CLOSED"
<input type="checkbox"/> OFF	09	Item prompt: "Setback ON/Setback OFF"	Prompt is not "Setback ON/Setback OFF"

NOTE: Only ONE of Options 07, 08 or 09 may be selected.

182 Automation Item 11: Schedule Assignment

Follows Schedule

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

183 Automation Item 11: Mode Assignment

Follows Schedule

	1	2	3	4	5	6	7	8
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

184 Automation Item 11: Timer / Output Condition

Enter one 2-digit number to determine how the Automation Item will operate.

Default

0 0

Option	Operation
00	Manual user control only
01	Alarm System Output Only
02	Schedule Only
03	Schedule or Alarm System Output
04	Schedule and Alarm System Output

185 Automation Item 12: House Code and Unit Number

Default

0 0 0

186 Automation Item 12: Miscellaneous Options

Default		Option	ON	OFF
<u>OFF</u>	<u> </u>	01	Automation Item enabled	Automation Item disabled
<u>ON</u>	<u> </u>	02	User Controlled ON/OFF	Not user controlled
<u>OFF</u>	<u> </u>	03	Included in Global ON/OFF Command	Not included in Global ON/OFF Command
<u>OFF</u>	<u> </u>	04	Dimming Enabled	Dimming Disabled
<u>OFF</u>	<u> </u>	05	Follows Schedule ON/OFF Output Condition Always	Follows Schedule ON/OFF Output Condition only when Mode is ON
<u>ON</u>	<u> </u>	06	Item is ON steady when active	Item activates for programmed time
<u>ON</u>	<u> </u>	07	Item prompt: "ON/OFF"	Prompt is not "ON/OFF"
<u>OFF</u>	<u> </u>	08	Item prompt: "OPEN/CLOSED"	Prompt is not "OPEN/CLOSED"
<u>OFF</u>	<u> </u>	09	Item prompt: "Setback ON/Setback OFF"	Prompt is not "Setback ON/Setback OFF"

NOTE: Only ONE of Options 07, 08 or 09 may be selected.

187 Automation Item 12: Schedule Assignment

Follows Schedule

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>

188 Automation Item 12: Mode Assignment

Follows Schedule

	1	2	3	4	5	6	7	8
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>

189 Automation Item 12: Timer / Output Condition

Enter one 2-digit number to determine how the Automation Item will operate.

Default

0 0

Option	Operation
00	Manual user control only
01	Alarm System Output Only
02	Schedule Only
03	Schedule or Alarm System Output
04	Schedule and Alarm System Output

190 Automation Item 13: House Code and Unit Number

Default

0 0 0 _ _ _

191 Automation Item 13: Miscellaneous Options

Default		Option	ON	OFF
<u>OFF</u>	<input type="checkbox"/>	01	Automation Item enabled	Automation Item disabled
<u>ON</u>	<input type="checkbox"/>	02	User Controlled ON/OFF	Not user controlled
<u>OFF</u>	<input type="checkbox"/>	03	Included in Global ON/OFF Command	Not included in Global ON/OFF Command
<u>OFF</u>	<input type="checkbox"/>	04	Dimming Enabled	Dimming Disabled
<u>OFF</u>	<input type="checkbox"/>	05	Follows Schedule ON/OFF Output Condition Always	Follows Schedule ON/OFF Output Condition only when Mode is ON
<u>ON</u>	<input type="checkbox"/>	06	Item is ON steady when active	Item activates for programmed time
<u>ON</u>	<input type="checkbox"/>	07	Item prompt: "ON/OFF"	Prompt is not "ON/OFF"
<u>OFF</u>	<input type="checkbox"/>	08	Item prompt: "OPEN/CLOSED"	Prompt is not "OPEN/CLOSED"
<u>OFF</u>	<input type="checkbox"/>	09	Item prompt: "Setback ON/Setback OFF"	Prompt is not "Setback ON/Setback OFF"

NOTE: Only ONE of Options 07, 08 or 09 may be selected.

192 Automation Item 13: Schedule Assignment

Follows Schedule

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

193 Automation Item 13: Mode Assignment

Follows Schedule

	1	2	3	4	5	6	7	8
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

194 Automation Item 13: Timer / Output Condition

Enter one 2-digit number to determine how the Automation Item will operate.

Default

0 0 _ _

Option	Operation
00	Manual user control only
01	Alarm System Output Only
02	Schedule Only
03	Schedule or Alarm System Output
04	Schedule and Alarm System Output

195 Automation Item 14: House Code and Unit Number

Default

0 0 0

196 Automation Item 14: Miscellaneous Options

Default	Option	ON	OFF
<u>OFF</u> <u> </u>	01	Automation Item enabled	Automation Item disabled
<u>ON</u> <u> </u>	02	User Controlled ON/OFF	Not user controlled
<u>OFF</u> <u> </u>	03	Included in Global ON/OFF Command	Not included in Global ON/OFF Command
<u>OFF</u> <u> </u>	04	Dimming Enabled	Dimming Disabled
<u>OFF</u> <u> </u>	05	Follows Schedule ON/OFF Output Condition Always	Follows Schedule ON/OFF Output Condition only when Mode is ON
<u>ON</u> <u> </u>	06	Item is ON steady when active	Item activates for programmed time
<u>ON</u> <u> </u>	07	Item prompt: "ON/OFF"	Prompt is not "ON/OFF"
<u>OFF</u> <u> </u>	08	Item prompt: "OPEN/CLOSED"	Prompt is not "OPEN/CLOSED"
<u>OFF</u> <u> </u>	09	Item prompt: "Setback ON/Setback OFF"	Prompt is not "Setback ON/Setback OFF"

NOTE: Only ONE of Options 07, 08 or 09 may be selected.

197 Automation Item 14: Schedule Assignment

Follows Schedule

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>

198 Automation Item 14: Mode Assignment

Follows Schedule

	1	2	3	4	5	6	7	8
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>

199 Automation Item 14: Timer / Output Condition

Enter one 2-digit number to determine how the Automation Item will operate.

Default

0 0

Option	Operation
00	Manual user control only
01	Alarm System Output Only
02	Schedule Only
03	Schedule or Alarm System Output
04	Schedule and Alarm System Output

200 Automation Item 15: House Code and Unit Number

Default

0 0 0 _ _ _

201 Automation Item 15: Miscellaneous Options

Default		Option	ON	OFF
OFF	<input type="checkbox"/>	01	Automation Item enabled	Automation Item disabled
ON	<input type="checkbox"/>	02	User Controlled ON/OFF	Not user controlled
OFF	<input type="checkbox"/>	03	Included in Global ON/OFF Command	Not included in Global ON/OFF Command
OFF	<input type="checkbox"/>	04	Dimming Enabled	Dimming Disabled
OFF	<input type="checkbox"/>	05	Follows Schedule ON/OFF Output Condition Always	Follows Schedule ON/OFF Output Condition only when Mode is ON
ON	<input type="checkbox"/>	06	Item is ON steady when active	Item activates for programmed time
ON	<input type="checkbox"/>	07	Item prompt: "ON/OFF"	Prompt is not "ON/OFF"
OFF	<input type="checkbox"/>	08	Item prompt: "OPEN/CLOSED"	Prompt is not "OPEN/CLOSED"
OFF	<input type="checkbox"/>	09	Item prompt: "Setback ON/Setback OFF"	Prompt is not "Setback ON/Setback OFF"

NOTE: Only ONE of Options 07, 08 or 09 may be selected.

202 Automation Item 15: Schedule Assignment

Follows Schedule

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

203 Automation Item 15: Mode Assignment

Follows Schedule

	1	2	3	4	5	6	7	8
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

204 Automation Item 15: Timer / Output Condition

Enter one 2-digit number to determine how the Automation Item will operate.

Default

0 0 _ _

Option	Operation
00	Manual user control only
01	Alarm System Output Only
02	Schedule Only
03	Schedule or Alarm System Output
04	Schedule and Alarm System Output

205 Automation Item 16: House Code and Unit Number

Default

0 0 0 _ _ _

206 Automation Item 16: Miscellaneous Options

Default

Option ON

OFF

<u>OFF</u>	<input type="checkbox"/>	01	Automation Item enabled	Automation Item disabled
<u>ON</u>	<input type="checkbox"/>	02	User Controlled ON/OFF	Not user controlled
<u>OFF</u>	<input type="checkbox"/>	03	Included in Global ON/OFF Command	Not included in Global ON/OFF Command
<u>OFF</u>	<input type="checkbox"/>	04	Dimming Enabled	Dimming Disabled
<u>OFF</u>	<input type="checkbox"/>	05	Follows Schedule ON/OFF Output Condition Always	Follows Schedule ON/OFF Output Condition only when Mode is ON
<u>ON</u>	<input type="checkbox"/>	06	Item is ON steady when active	Item activates for programmed time
<u>ON</u>	<input type="checkbox"/>	07	Item prompt: "ON/OFF"	Prompt is not "ON/OFF"
<u>OFF</u>	<input type="checkbox"/>	08	Item prompt: "OPEN/CLOSED"	Prompt is not "OPEN/CLOSED"
<u>OFF</u>	<input type="checkbox"/>	09	Item prompt: "Setback ON/Setback OFF"	Prompt is not "Setback ON/Setback OFF"

NOTE: Only ONE of Options 07, 08 or 09 may be selected.

207 Automation Item 16: Schedule Assignment

Follows Schedule

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

208 Automation Item 16: Mode Assignment

Follows Schedule

	1	2	3	4	5	6	7	8
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

209 Automation Item 16: Timer / Output Condition

Enter one 2-digit number to determine how the Automation Item will operate.

Default

0 0 _ _

Option

Operation

- 00 Manual user control only
- 01 Alarm System Output Only
- 02 Schedule Only
- 03 Schedule **or** Alarm System Output
- 04 Schedule **and** Alarm System Output

210 Automation Item 17: House Code and Unit Number

Default

0 0 0 _ _ _

211 Automation Item 17: Miscellaneous Options

Default		Option	ON	OFF
<input type="checkbox"/> OFF	<input type="checkbox"/>	01	Automation Item enabled	Automation Item disabled
<input type="checkbox"/> ON	<input type="checkbox"/>	02	User Controlled ON/OFF	Not user controlled
<input type="checkbox"/> OFF	<input type="checkbox"/>	03	Included in Global ON/OFF Command	Not included in Global ON/OFF Command
<input type="checkbox"/> OFF	<input type="checkbox"/>	04	Dimming Enabled	Dimming Disabled
<input type="checkbox"/> OFF	<input type="checkbox"/>	05	Follows Schedule ON/OFF Output Condition Always	Follows Schedule ON/OFF Output Condition only when Mode is ON
<input type="checkbox"/> ON	<input type="checkbox"/>	06	Item is ON steady when active	Item activates for programmed time
<input type="checkbox"/> ON	<input type="checkbox"/>	07	Item prompt: "ON/OFF"	Prompt is not "ON/OFF"
<input type="checkbox"/> OFF	<input type="checkbox"/>	08	Item prompt: "OPEN/CLOSED"	Prompt is not "OPEN/CLOSED"
<input type="checkbox"/> OFF	<input type="checkbox"/>	09	Item prompt: "Setback ON/Setback OFF"	Prompt is not "Setback ON/Setback OFF"

NOTE: Only ONE of Options 07, 08 or 09 may be selected.

212 Automation Item 17: Schedule Assignment

Follows Schedule

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

213 Automation Item 17: Mode Assignment

Follows Schedule

	1	2	3	4	5	6	7	8
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

214 Automation Item 17: Timer / Output Condition

Enter one 2-digit number to determine how the Automation Item will operate.

Default

0 0 _ _

Option	Operation
00	Manual user control only
01	Alarm System Output Only
02	Schedule Only
03	Schedule or Alarm System Output
04	Schedule and Alarm System Output

215 Automation Item 18: House Code and Unit Number

Default

0 0 0 _ _ _

216 Automation Item 18: Miscellaneous Options

Default		Option	ON	OFF
<u>OFF</u>	<input type="checkbox"/>	01	Automation Item enabled	Automation Item disabled
<u>ON</u>	<input type="checkbox"/>	02	User Controlled ON/OFF	Not user controlled
<u>OFF</u>	<input type="checkbox"/>	03	Included in Global ON/OFF Command	Not included in Global ON/OFF Command
<u>OFF</u>	<input type="checkbox"/>	04	Dimming Enabled	Dimming Disabled
<u>OFF</u>	<input type="checkbox"/>	05	Follows Schedule ON/OFF Output Condition Always	Follows Schedule ON/OFF Output Condition only when Mode is ON
<u>ON</u>	<input type="checkbox"/>	06	Item is ON steady when active	Item activates for programmed time
<u>ON</u>	<input type="checkbox"/>	07	Item prompt: "ON/OFF"	Prompt is not "ON/OFF"
<u>OFF</u>	<input type="checkbox"/>	08	Item prompt: "OPEN/CLOSED"	Prompt is not "OPEN/CLOSED"
<u>OFF</u>	<input type="checkbox"/>	09	Item prompt: "Setback ON/Setback OFF"	Prompt is not "Setback ON/Setback OFF"

NOTE: Only ONE of Options 07, 08 or 09 may be selected.

217 Automation Item 18: Schedule Assignment

Follows Schedule

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

218 Automation Item 18: Mode Assignment

Follows Schedule

	1	2	3	4	5	6	7	8
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

219 Automation Item 18: Timer / Output Condition

Enter one 2-digit number to determine how the Automation Item will operate.

Default

0 0 _ _

Option	Operation
00	Manual user control only
01	Alarm System Output Only
02	Schedule Only
03	Schedule or Alarm System Output
04	Schedule and Alarm System Output

220 Automation Item 19: House Code and Unit Number

Default

0 0 0 _ _ _

221 Automation Item 19: Miscellaneous Options

Default		Option	ON	OFF
<input type="checkbox"/> OFF	<input type="checkbox"/>	01	Automation Item enabled	Automation Item disabled
<input type="checkbox"/> ON	<input type="checkbox"/>	02	User Controlled ON/OFF	Not user controlled
<input type="checkbox"/> OFF	<input type="checkbox"/>	03	Included in Global ON/OFF Command	Not included in Global ON/OFF Command
<input type="checkbox"/> OFF	<input type="checkbox"/>	04	Dimming Enabled	Dimming Disabled
<input type="checkbox"/> OFF	<input type="checkbox"/>	05	Follows Schedule ON/OFF Output Condition Always	Follows Schedule ON/OFF Output Condition only when Mode is ON
<input type="checkbox"/> ON	<input type="checkbox"/>	06	Item is ON steady when active	Item activates for programmed time
<input type="checkbox"/> ON	<input type="checkbox"/>	07	Item prompt: "ON/OFF"	Prompt is not "ON/OFF"
<input type="checkbox"/> OFF	<input type="checkbox"/>	08	Item prompt: "OPEN/CLOSED"	Prompt is not "OPEN/CLOSED"
<input type="checkbox"/> OFF	<input type="checkbox"/>	09	Item prompt: "Setback ON/Setback OFF"	Prompt is not "Setback ON/Setback OFF"

NOTE: Only ONE of Options 07, 08 or 09 may be selected.

222 Automation Item 19: Schedule Assignment

Follows Schedule

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

223 Automation Item 19: Mode Assignment

Follows Schedule

	1	2	3	4	5	6	7	8
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

224 Automation Item 19: Timer / Output Condition

Enter one 2-digit number to determine how the Automation Item will operate.

Default

0 0 _ _

Option	Operation
00	Manual user control only
01	Alarm System Output Only
02	Schedule Only
03	Schedule or Alarm System Output
04	Schedule and Alarm System Output

225 Automation Item 20: House Code and Unit Number

Default

0 0 0 _ _ _

226 Automation Item 20: Miscellaneous Options

Default		Option	ON	OFF
<u>OFF</u>	<u> </u>	01	Automation Item enabled	Automation Item disabled
<u>ON</u>	<u> </u>	02	User Controlled ON/OFF	Not user controlled
<u>OFF</u>	<u> </u>	03	Included in Global ON/OFF Command	Not included in Global ON/OFF Command
<u>OFF</u>	<u> </u>	04	Dimming Enabled	Dimming Disabled
<u>OFF</u>	<u> </u>	05	Follows Schedule ON/OFF Output Condition Always	Follows Schedule ON/OFF Output Condition only when Mode is ON
<u>ON</u>	<u> </u>	06	Item is ON steady when active	Item activates for programmed time
<u>ON</u>	<u> </u>	07	Item prompt: "ON/OFF"	Prompt is not "ON/OFF"
<u>OFF</u>	<u> </u>	08	Item prompt: "OPEN/CLOSED"	Prompt is not "OPEN/CLOSED"
<u>OFF</u>	<u> </u>	09	Item prompt: "Setback ON/Setback OFF"	Prompt is not "Setback ON/Setback OFF"

NOTE: Only ONE of Options 07, 08 or 09 may be selected.

227 Automation Item 20: Schedule Assignment

Follows Schedule

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>

228 Automation Item 20: Mode Assignment

Follows Schedule

	1	2	3	4	5	6	7	8
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>

229 Automation Item 20: Timer / Output Condition

Enter one 2-digit number to determine how the Automation Item will operate.

Default

0 0 _ _

Option	Operation
00	Manual user control only
01	Alarm System Output Only
02	Schedule Only
03	Schedule or Alarm System Output
04	Schedule and Alarm System Output

230 Automation Item 21: House Code and Unit Number

Default

0 0 0

231 Automation Item 21: Miscellaneous Options

Default	Option	ON	OFF
<input type="checkbox"/> OFF	01	Automation Item enabled	Automation Item disabled
<input type="checkbox"/> ON	02	User Controlled ON/OFF	Not user controlled
<input type="checkbox"/> OFF	03	Included in Global ON/OFF Command	Not included in Global ON/OFF Command
<input type="checkbox"/> OFF	04	Dimming Enabled	Dimming Disabled
<input type="checkbox"/> OFF	05	Follows Schedule ON/OFF Output Condition Always	Follows Schedule ON/OFF Output Condition only when Mode is ON
<input type="checkbox"/> ON	06	Item is ON steady when active	Item activates for programmed time
<input type="checkbox"/> ON	07	Item prompt: "ON/OFF"	Prompt is not "ON/OFF"
<input type="checkbox"/> OFF	08	Item prompt: "OPEN/CLOSED"	Prompt is not "OPEN/CLOSED"
<input type="checkbox"/> OFF	09	Item prompt: "Setback ON/Setback OFF"	Prompt is not "Setback ON/Setback OFF"

NOTE: Only ONE of Options 07, 08 or 09 may be selected.

232 Automation Item 21: Schedule Assignment

	Follows Schedule															
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

233 Automation Item 21: Mode Assignment

	Follows Schedule							
	1	2	3	4	5	6	7	8
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

234 Automation Item 21: Timer / Output Condition

Enter one 2-digit number to determine how the Automation Item will operate.

Default

0 0

Option	Operation
00	Manual user control only
01	Alarm System Output Only
02	Schedule Only
03	Schedule or Alarm System Output
04	Schedule and Alarm System Output

235 Automation Item 22: House Code and Unit Number

Default

0 0 0

236 Automation Item 22: Miscellaneous Options

Default		Option	ON	OFF
<u>OFF</u>	<u> </u>	01	Automation Item enabled	Automation Item disabled
<u>ON</u>	<u> </u>	02	User Controlled ON/OFF	Not user controlled
<u>OFF</u>	<u> </u>	03	Included in Global ON/OFF Command	Not included in Global ON/OFF Command
<u>OFF</u>	<u> </u>	04	Dimming Enabled	Dimming Disabled
<u>OFF</u>	<u> </u>	05	Follows Schedule ON/OFF Output Condition Always	Follows Schedule ON/OFF Output Condition only when Mode is ON
<u>ON</u>	<u> </u>	06	Item is ON steady when active	Item activates for programmed time
<u>ON</u>	<u> </u>	07	Item prompt: "ON/OFF"	Prompt is not "ON/OFF"
<u>OFF</u>	<u> </u>	08	Item prompt: "OPEN/CLOSED"	Prompt is not "OPEN/CLOSED"
<u>OFF</u>	<u> </u>	09	Item prompt: "Setback ON/Setback OFF"	Prompt is not "Setback ON/Setback OFF"

NOTE: Only ONE of Options 07, 08 or 09 may be selected.

237 Automation Item 22: Schedule Assignment

	Follows Schedule															
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>

238 Automation Item 22: Mode Assignment

	Follows Schedule							
	1	2	3	4	5	6	7	8
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>

239 Automation Item 22: Timer / Output Condition

Enter one 2-digit number to determine how the Automation Item will operate.

Default

0 0

Option	Operation
00	Manual user control only
01	Alarm System Output Only
02	Schedule Only
03	Schedule or Alarm System Output
04	Schedule and Alarm System Output

240 Automation Item 23: House Code and Unit Number

Default

0 0 0 **241 Automation Item 23: Miscellaneous Options**

Default		Option	ON	OFF
<u>OFF</u>	<u> </u>	01	Automation Item enabled	Automation Item disabled
<u>ON</u>	<u> </u>	02	User Controlled ON/OFF	Not user controlled
<u>OFF</u>	<u> </u>	03	Included in Global ON/OFF Command	Not included in Global ON/OFF Command
<u>OFF</u>	<u> </u>	04	Dimming Enabled	Dimming Disabled
<u>OFF</u>	<u> </u>	05	Follows Schedule ON/OFF Output Condition Always	Follows Schedule ON/OFF Output Condition only when Mode is ON
<u>ON</u>	<u> </u>	06	Item is ON steady when active	Item activates for programmed time
<u>ON</u>	<u> </u>	07	Item prompt: "ON/OFF"	Prompt is not "ON/OFF"
<u>OFF</u>	<u> </u>	08	Item prompt: "OPEN/CLOSED"	Prompt is not "OPEN/CLOSED"
<u>OFF</u>	<u> </u>	09	Item prompt: "Setback ON/Setback OFF"	Prompt is not "Setback ON/Setback OFF"

NOTE: Only ONE of Options 07, 08 or 09 may be selected.**242 Automation Item 23: Schedule Assignment**

Follows Schedule

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>

243 Automation Item 23: Mode Assignment

Follows Schedule

	1	2	3	4	5	6	7	8
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>

244 Automation Item 23: Timer / Output Condition

Enter one 2-digit number to determine how the Automation Item will operate.

Default

0 0

Option Operation

- 00 Manual user control only
- 01 Alarm System Output Only
- 02 Schedule Only
- 03 Schedule **or** Alarm System Output
- 04 Schedule **and** Alarm System Output

245 Automation Item 24: House Code and Unit Number

Default

0 0 0 _ _ _

246 Automation Item 24: Miscellaneous Options

Default		Option	ON	OFF
<input type="checkbox"/> OFF	<input type="checkbox"/>	01	Automation Item enabled	Automation Item disabled
<input type="checkbox"/> ON	<input type="checkbox"/>	02	User Controlled ON/OFF	Not user controlled
<input type="checkbox"/> OFF	<input type="checkbox"/>	03	Included in Global ON/OFF Command	Not included in Global ON/OFF Command
<input type="checkbox"/> OFF	<input type="checkbox"/>	04	Dimming Enabled	Dimming Disabled
<input type="checkbox"/> OFF	<input type="checkbox"/>	05	Follows Schedule ON/OFF Output Condition Always	Follows Schedule ON/OFF Output Condition only when Mode is ON
<input type="checkbox"/> ON	<input type="checkbox"/>	06	Item is ON steady when active	Item activates for programmed time
<input type="checkbox"/> ON	<input type="checkbox"/>	07	Item prompt: "ON/OFF"	Prompt is not "ON/OFF"
<input type="checkbox"/> OFF	<input type="checkbox"/>	08	Item prompt: "OPEN/CLOSED"	Prompt is not "OPEN/CLOSED"
<input type="checkbox"/> OFF	<input type="checkbox"/>	09	Item prompt: "Setback ON/Setback OFF"	Prompt is not "Setback ON/Setback OFF"

NOTE: Only ONE of Options 07, 08 or 09 may be selected.

247 Automation Item 24: Schedule Assignment

Follows Schedule

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

248 Automation Item 24: Mode Assignment

Follows Schedule

	1	2	3	4	5	6	7	8
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

249 Automation Item 24: Timer / Output Condition

Enter one 2-digit number to determine how the Automation Item will operate.

Default

0 0 _ _

Option	Operation
00	Manual user control only
01	Alarm System Output Only
02	Schedule Only
03	Schedule or Alarm System Output
04	Schedule and Alarm System Output

250 Automation Item 25: House Code and Unit Number

Default

0 0 0

251 Automation Item 25: Miscellaneous Options

Default		Option	ON	OFF
<u>OFF</u>	<u> </u>	01	Automation Item enabled	Automation Item disabled
<u>ON</u>	<u> </u>	02	User Controlled ON/OFF	Not user controlled
<u>OFF</u>	<u> </u>	03	Included in Global ON/OFF Command	Not included in Global ON/OFF Command
<u>OFF</u>	<u> </u>	04	Dimming Enabled	Dimming Disabled
<u>OFF</u>	<u> </u>	05	Follows Schedule ON/OFF Output Condition Always	Follows Schedule ON/OFF Output Condition only when Mode is ON
<u>ON</u>	<u> </u>	06	Item is ON steady when active	Item activates for programmed time
<u>ON</u>	<u> </u>	07	Item prompt: "ON/OFF"	Prompt is not "ON/OFF"
<u>OFF</u>	<u> </u>	08	Item prompt: "OPEN/CLOSED"	Prompt is not "OPEN/CLOSED"
<u>OFF</u>	<u> </u>	09	Item prompt: "Setback ON/Setback OFF"	Prompt is not "Setback ON/Setback OFF"

NOTE: Only ONE of Options 07, 08 or 09 may be selected.

252 Automation Item 25: Schedule Assignment

Follows Schedule

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>

253 Automation Item 25: Mode Assignment

Follows Schedule

	1	2	3	4	5	6	7	8
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>

254 Automation Item 25: Timer / Output Condition

Enter one 2-digit number to determine how the Automation Item will operate.

Default

0 0

Option	Operation
00	Manual user control only
01	Alarm System Output Only
02	Schedule Only
03	Schedule or Alarm System Output
04	Schedule and Alarm System Output

255 Automation Item 26: House Code and Unit Number

Default

0	0	0			
---	---	---	--	--	--

256 Automation Item 26: Miscellaneous Options

Default		Option	ON	OFF
<u>OFF</u>	<input type="checkbox"/>	01	Automation Item enabled	Automation Item disabled
<u>ON</u>	<input type="checkbox"/>	02	User Controlled ON/OFF	Not user controlled
<u>OFF</u>	<input type="checkbox"/>	03	Included in Global ON/OFF Command	Not included in Global ON/OFF Command
<u>OFF</u>	<input type="checkbox"/>	04	Dimming Enabled	Dimming Disabled
<u>OFF</u>	<input type="checkbox"/>	05	Follows Schedule ON/OFF Output Condition Always	Follows Schedule ON/OFF Output Condition only when Mode is ON
<u>ON</u>	<input type="checkbox"/>	06	Item is ON steady when active	Item activates for programmed time
<u>ON</u>	<input type="checkbox"/>	07	Item prompt: "ON/OFF"	Prompt is not "ON/OFF"
<u>OFF</u>	<input type="checkbox"/>	08	Item prompt: "OPEN/CLOSED"	Prompt is not "OPEN/CLOSED"
<u>OFF</u>	<input type="checkbox"/>	09	Item prompt: "Setback ON/Setback OFF"	Prompt is not "Setback ON/Setback OFF"

NOTE: Only ONE of Options 07, 08 or 09 may be selected.**257 Automation Item 26: Schedule Assignment**

Follows Schedule

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

258 Automation Item 26: Mode Assignment

Follows Schedule

	1	2	3	4	5	6	7	8
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

259 Automation Item 26: Timer / Output Condition

Enter one 2-digit number to determine how the Automation Item will operate.

Default

0	0		
---	---	--	--

Option	Operation
00	Manual user control only
01	Alarm System Output Only
02	Schedule Only
03	Schedule or Alarm System Output
04	Schedule and Alarm System Output

260 Automation Item 27: House Code and Unit Number

Default

0 0 0 _ _ _

261 Automation Item 27: Miscellaneous Options

Default	Option	ON	OFF
<u>OFF</u>	<u> </u>	01 Automation Item enabled	Automation Item disabled
<u>ON</u>	<u> </u>	02 User Controlled ON/OFF	Not user controlled
<u>OFF</u>	<u> </u>	03 Included in Global ON/OFF Command	Not included in Global ON/OFF Command
<u>OFF</u>	<u> </u>	04 Dimming Enabled	Dimming Disabled
<u>OFF</u>	<u> </u>	05 Follows Schedule ON/OFF Output Condition Always	Follows Schedule ON/OFF Output Condition only when Mode is ON
<u>ON</u>	<u> </u>	06 Item is ON steady when active	Item activates for programmed time
<u>ON</u>	<u> </u>	07 Item prompt: "ON/OFF"	Prompt is not "ON/OFF"
<u>OFF</u>	<u> </u>	08 Item prompt: "OPEN/CLOSED"	Prompt is not "OPEN/CLOSED"
<u>OFF</u>	<u> </u>	09 Item prompt: "Setback ON/Setback OFF"	Prompt is not "Setback ON/Setback OFF"

NOTE: Only ONE of Options 07, 08 or 09 may be selected.

262 Automation Item 27: Schedule Assignment

Follows Schedule

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>

263 Automation Item 27: Mode Assignment

Follows Schedule

	1	2	3	4	5	6	7	8
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>

264 Automation Item 27: Timer / Output Condition

Enter one 2-digit number to determine how the Automation Item will operate.

Default

0 0 _ _

Option	Operation
00	Manual user control only
01	Alarm System Output Only
02	Schedule Only
03	Schedule or Alarm System Output
04	Schedule and Alarm System Output

265 Automation Item 28: House Code and Unit Number

Default

0 0 0 _ _ _

266 Automation Item 28: Miscellaneous Options

Default		Option	ON	OFF
<u>OFF</u>	<u> </u>	01	Automation Item enabled	Automation Item disabled
<u>ON</u>	<u> </u>	02	User Controlled ON/OFF	Not user controlled
<u>OFF</u>	<u> </u>	03	Included in Global ON/OFF Command	Not included in Global ON/OFF Command
<u>OFF</u>	<u> </u>	04	Dimming Enabled	Dimming Disabled
<u>OFF</u>	<u> </u>	05	Follows Schedule ON/OFF Output Condition Always	Follows Schedule ON/OFF Output Condition only when Mode is ON
<u>ON</u>	<u> </u>	06	Item is ON steady when active	Item activates for programmed time
<u>ON</u>	<u> </u>	07	Item prompt: "ON/OFF"	Prompt is not "ON/OFF"
<u>OFF</u>	<u> </u>	08	Item prompt: "OPEN/CLOSED"	Prompt is not "OPEN/CLOSED"
<u>OFF</u>	<u> </u>	09	Item prompt: "Setback ON/Setback OFF"	Prompt is not "Setback ON/Setback OFF"

NOTE: Only ONE of Options 07, 08 or 09 may be selected.

267 Automation Item 28: Schedule Assignment

Follows Schedule

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>

268 Automation Item 28: Mode Assignment

Follows Schedule

	1	2	3	4	5	6	7	8
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>

269 Automation Item 28: Timer / Output Condition

Enter one 2-digit number to determine how the Automation Item will operate.

Default

0 0 _ _

Option	Operation
00	Manual user control only
01	Alarm System Output Only
02	Schedule Only
03	Schedule or Alarm System Output
04	Schedule and Alarm System Output

270 Automation Item 29: House Code and Unit Number

Default

0	0	0			
---	---	---	--	--	--

271 Automation Item 29: Miscellaneous Options

Default		Option	ON	OFF
<u>OFF</u>	<input type="checkbox"/>	01	Automation Item enabled	Automation Item disabled
<u>ON</u>	<input type="checkbox"/>	02	User Controlled ON/OFF	Not user controlled
<u>OFF</u>	<input type="checkbox"/>	03	Included in Global ON/OFF Command	Not included in Global ON/OFF Command
<u>OFF</u>	<input type="checkbox"/>	04	Dimming Enabled	Dimming Disabled
<u>OFF</u>	<input type="checkbox"/>	05	Follows Schedule ON/OFF Output Condition Always	Follows Schedule ON/OFF Output Condition only when Mode is ON
<u>ON</u>	<input type="checkbox"/>	06	Item is ON steady when active	Item activates for programmed time
<u>ON</u>	<input type="checkbox"/>	07	Item prompt: "ON/OFF"	Prompt is not "ON/OFF"
<u>OFF</u>	<input type="checkbox"/>	08	Item prompt: "OPEN/CLOSED"	Prompt is not "OPEN/CLOSED"
<u>OFF</u>	<input type="checkbox"/>	09	Item prompt: "Setback ON/Setback OFF"	Prompt is not "Setback ON/Setback OFF"

NOTE: Only ONE of Options 07, 08 or 09 may be selected.**272 Automation Item 29: Schedule Assignment**

Follows Schedule

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16																
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF																
	<table><tr><td></td></tr></table>		<table><tr><td></td></tr></table>		<table><tr><td></td></tr></table>		<table><tr><td></td></tr></table>		<table><tr><td></td></tr></table>		<table><tr><td></td></tr></table>		<table><tr><td></td></tr></table>		<table><tr><td></td></tr></table>		<table><tr><td></td></tr></table>		<table><tr><td></td></tr></table>		<table><tr><td></td></tr></table>		<table><tr><td></td></tr></table>		<table><tr><td></td></tr></table>		<table><tr><td></td></tr></table>		<table><tr><td></td></tr></table>		<table><tr><td></td></tr></table>	

273 Automation Item 29: Mode Assignment

Follows Schedule

	1	2	3	4	5	6	7	8
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	<div></div>	<div></div>	<div></div>	<div></div>	<div></div>	<div></div>	<div></div>	<div></div>

274 Automation Item 29: Timer / Output Condition

Enter one 2-digit number to determine how the Automation Item will operate.

Default

0	0		
---	---	--	--

Option	Operation
00	Manual user control only
01	Alarm System Output Only
02	Schedule Only
03	Schedule or Alarm System Output
04	Schedule and Alarm System Output

275 Automation Item 30: House Code and Unit Number

Default

0 0 0

276 Automation Item 30: Miscellaneous Options

Default		Option	ON	OFF
<u>OFF</u>	<u> </u>	01	Automation Item enabled	Automation Item disabled
<u>ON</u>	<u> </u>	02	User Controlled ON/OFF	Not user controlled
<u>OFF</u>	<u> </u>	03	Included in Global ON/OFF Command	Not included in Global ON/OFF Command
<u>OFF</u>	<u> </u>	04	Dimming Enabled	Dimming Disabled
<u>OFF</u>	<u> </u>	05	Follows Schedule ON/OFF Output Condition Always	Follows Schedule ON/OFF Output Condition only when Mode is ON
<u>ON</u>	<u> </u>	06	Item is ON steady when active	Item activates for programmed time
<u>ON</u>	<u> </u>	07	Item prompt: "ON/OFF"	Prompt is not "ON/OFF"
<u>OFF</u>	<u> </u>	08	Item prompt: "OPEN/CLOSED"	Prompt is not "OPEN/CLOSED"
<u>OFF</u>	<u> </u>	09	Item prompt: "Setback ON/Setback OFF"	Prompt is not "Setback ON/Setback OFF"

NOTE: Only ONE of Options 07, 08 or 09 may be selected.

277 Automation Item 30: Schedule Assignment

	Follows Schedule															
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>

278 Automation Item 30: Mode Assignment

	Follows Schedule							
	1	2	3	4	5	6	7	8
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>

279 Automation Item 30: Timer / Output Condition

Enter one 2-digit number to determine how the Automation Item will operate.

Default

0 0

Option	Operation
00	Manual user control only
01	Alarm System Output Only
02	Schedule Only
03	Schedule or Alarm System Output
04	Schedule and Alarm System Output

280 Automation Item 31: House Code and Unit Number

Default

0 0 0

281 Automation Item 31: Miscellaneous Options

Default

Option ON

OFF

OFF

01 Automation Item enabled

Automation Item disabled

ON

02 User Controlled ON/OFF

Not user controlled

OFF

03 Included in Global ON/OFF Command

Not included in Global ON/OFF Command

OFF

04 Dimming Enabled

Dimming Disabled

OFF

05 Follows Schedule ON/OFF Output Condition Always

Follows Schedule ON/OFF Output Condition only when Mode is ON

ON

06 Item is ON steady when active

Item activates for programmed time

ON

07 Item prompt: "ON/OFF"

Prompt is not "ON/OFF"

OFF

08 Item prompt: "OPEN/CLOSED"

Prompt is not "OPEN/CLOSED"

OFF

09 Item prompt: "Setback ON/Setback OFF" Prompt is not "Setback ON/Setback OFF"

NOTE: Only ONE of Options 07, 08 or 09 may be selected.

282 Automation Item 31: Schedule Assignment

Follows Schedule

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>

283 Automation Item 31: Mode Assignment

Follows Schedule

	1	2	3	4	5	6	7	8
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>

284 Automation Item 31: Timer / Output Condition

Enter one 2-digit number to determine how the Automation Item will operate.

Default

0 0

Option Operation

00 Manual user control only

01 Alarm System Output Only

02 Schedule Only

03 Schedule **or** Alarm System Output

04 Schedule **and** Alarm System Output

285 Automation Item 32: House Code and Unit Number

Default

0 0 0

286 Automation Item 32: Miscellaneous Options

Default		Option	ON	OFF
<u>OFF</u>	<u> </u>	01	Automation Item enabled	Automation Item disabled
<u>ON</u>	<u> </u>	02	User Controlled ON/OFF	Not user controlled
<u>OFF</u>	<u> </u>	03	Included in Global ON/OFF Command	Not included in Global ON/OFF Command
<u>OFF</u>	<u> </u>	04	Dimming Enabled	Dimming Disabled
<u>OFF</u>	<u> </u>	05	Follows Schedule ON/OFF Output Condition Always	Follows Schedule ON/OFF Output Condition only when Mode is ON
<u>ON</u>	<u> </u>	06	Item is ON steady when active	Item activates for programmed time
<u>ON</u>	<u> </u>	07	Item prompt: "ON/OFF"	Prompt is not "ON/OFF"
<u>OFF</u>	<u> </u>	08	Item prompt: "OPEN/CLOSED"	Prompt is not "OPEN/CLOSED"
<u>OFF</u>	<u> </u>	09	Item prompt: "Setback ON/Setback OFF"	Prompt is not "Setback ON/Setback OFF"

NOTE: Only ONE of Options 07, 08 or 09 may be selected.

287 Automation Item 32: Schedule Assignment

Follows Schedule

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>

288 Automation Item 32: Mode Assignment

Follows Schedule

	1	2	3	4	5	6	7	8
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>

289 Automation Item 32: Timer / Output Condition

Enter one 2-digit number to determine how the Automation Item will operate.

Default

0 0

Option	Operation
00	Manual user control only
01	Alarm System Output Only
02	Schedule Only
03	Schedule or Alarm System Output
04	Schedule and Alarm System Output

Automation Item Pulse Timers

301 Automation Item 1: Pulse Time

Default

0 0 5

302 Automation Item 2: Pulse Time

Default

0 0 5

303 Automation Item 3: Pulse Time

Default

0 0 5

304 Automation Item 4: Pulse Time

Default

0 0 5

305 Automation Item 5: Pulse Time

Default

0 0 5

306 Automation Item 6: Pulse Time

Default

0 0 5

307 Automation Item 7: Pulse Time

Default

0 0 5

308 Automation Item 8: Pulse Time

Default

0 0 5

309 Automation Item 9: Pulse Time

Default

0 0 5

310 Automation Item 10: Pulse Time

Default

0 0 5

311 Automation Item 11: Pulse Time

Default

0 0 5

312 Automation Item 12: Pulse Time

Default

0 0 5

313 Automation Item 13: Pulse Time

Default

0 0 5

314 Automation Item 14: Pulse Time

Default

0 0 5

315 Automation Item 15: Pulse Time

Default

0 0 5

316 Automation Item 16: Pulse Time

Default

0 0 5

317 Automation Item 17: Pulse Time

Default

0 0 5

318 Automation Item 18: Pulse Time

Default

0 0 5

319 Automation Item 19: Pulse Time

Default

0 0 5

320 Automation Item 20: Pulse Time

Default

0 0 5

321 Automation Item 21: Pulse Time

Default

0 0 5

322 Automation Item 22: Pulse Time

Default

0 0 5

323 Automation Item 23: Pulse Time

Default

0 0 5

324 Automation Item 24: Pulse Time

Default

0 0 5

325 Automation Item 25: Pulse Time

Default

0 0 5

326 Automation Item 26: Pulse Time

Default

0 0 5

327 Automation Item 27: Pulse Time

Default

0 0 5

328 Automation Item 28: Pulse Time

Default

0 0 5

329 Automation Item 29: Pulse Time

Default

0 0 5

330 Automation Item 30: Pulse Time

Default

0 0 5

331 Automation Item 31: Pulse Time

Default

0 0 5

332 Automation Item 32: Pulse Time

Default

0 0 5

Label Programming

451 Automation Item 1 Label

Codes

Label

452 Automation Item 2 Label

Codes

Label

453 Automation Item 3 Label

Codes

Label

454 Automation Item 4 Label

Codes

Label

455 Automation Item 5 Label

Codes

Label

456 Automation Item 6 Label

Codes

Label

457 Automation Item 7 Label

Codes

Label

458 Automation Item 8 Label

Codes

Label

459 Automation Item 9 Label

Codes

Label

460 Automation Item 10 Label

Codes

Label

461 Automation Item 11 Label

Codes

Label

462 Automation Item 12 Label

Codes

Label

463 Automation Item 13 Label

Codes

Label

464 Automation Item 14 Label

Codes

Label

465 Automation Item 15 Label

Codes

Label

466 Automation Item 16 Label

Codes

Label

467 Automation Item 17 Label

Codes

Label

468 Automation Item 18 Label

Codes

Label

469 Automation Item 19 Label

Codes

Label

470 Automation Item 20 Label

Codes

Label

471 Automation Item 21 Label

Codes

Label

472 Automation Item 22 Label

Codes

Label

473 Automation Item 23 Label

Codes

Label

474 Automation Item 24 Label

Codes

Label

475 Automation Item 25 Label

Codes

Label

476 Automation Item 26 Label

Codes

Label

477 Automation Item 27 Label

Codes

Label

478 Automation Item 28 Label

Codes

Label

479 Automation Item 29 Label

Codes

Label _____

480 Automation Item 30 Label

Codes

Label _____

481 Automation Item 31 Label

Codes

Label

482 Automation Item 32 Label

Codes

Label

521 Automation Mode 1 LabelCodes

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

Label

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

522 Automation Mode 2 LabelCodes

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

Label

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

523 Automation Mode 3 LabelCodes

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

Label

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

524 Automation Mode 4 LabelCodes

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

Label

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

525 Automation Mode 5 LabelCodes

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

Label

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

526 Automation Mode 6 LabelCodes

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

Label

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

527 Automation Mode 7 LabelCodes

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

Label

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

528 Automation Mode 8 LabelCodes

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

Label

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

545 Sensor Reset LabelCodes

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

Label

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

546 Door Strike LabelCodes

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

Label

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

Codes

Label					
-------	--	--	--	--	--

562 Partition 2 Label

Codes

Label

563 Partition 3 Label

Codes

--	--	--

--	--	--

--	--	--	--

--	--	--	--

--	--	--	--

--	--	--

Label

564 Partition 4 Label

Codes

Label

565 Partition 5 Label

Codes

Label:

566 Partition 6 Label

Codes

Label _____

567 Partition 7 Label

Codes

Label

568 Partition 8 Label

Codes

Label

601 Zone Label: Zone 1

Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

602 Zone Label: Zone 2

Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

603 Zone Label: Zone 3

Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

604 Zone Label: Zone 4

Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

605 Zone Label: Zone 5

Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

606 Zone Label: Zone 6

Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

607 Zone Label: Zone 7

Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

608 Zone Label: Zone 8

Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

609 Zone Label: Zone 9

Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

610 Zone Label: Zone 10

Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

611 Zone Label: Zone 11

Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

612 Zone Label: Zone 12

Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

613 Zone Label: Zone 13Codes

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

Label

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

614 Zone Label: Zone 14Codes

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

Label

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

615 Zone Label: Zone 15Codes

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

Label

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

616 Zone Label: Zone 16Codes

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

Label

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

617 Zone Label: Zone 17Codes

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

Label

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

618 Zone Label: Zone 18Codes

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

Label

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

619 Zone Label: Zone 19Codes

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

Label

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

620 Zone Label: Zone 20Codes

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

Label

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

621 Zone Label: Zone 21Codes

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

Label

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

622 Zone Label: Zone 22Codes

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

Label

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

623 Zone Label: Zone 23Codes

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

Label

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

624 Zone Label: Zone 24Codes

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

Label

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

625 Zone Label: Zone 25

Codes

Label

626 Zone Label: Zone 26

Codes

Label

627 Zone Label: Zone 27

Codes

Label

628 Zone Label: Zone 28

Codes

Label

629 Zone Label: Zone 29

Codes

Label

630 Zone Label: Zone 30

Codes

Label

631 Zone Label: Zone 31

Codes

Label

632 Zone Label: Zone 32

Codes

Label

633 Zone Label: Zone 33

Codes

Label

634 Zone Label: Zone 34

Codes

Label

635 Zone Label: Zone 35

Codes

Label

636 Zone Label: Zone 36

Codes

Label

637 Zone Label: Zone 37Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

638 Zone Label: Zone 38Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

639 Zone Label: Zone 39Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

640 Zone Label: Zone 40Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

641 Zone Label: Zone 41Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

642 Zone Label: Zone 42Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

643 Zone Label: Zone 43Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

644 Zone Label: Zone 44Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

645 Zone Label: Zone 45Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

646 Zone Label: Zone 46Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

647 Zone Label: Zone 47Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

648 Zone Label: Zone 48Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

649 Zone Label: Zone 49

Codes					
Label					

650 Zone Label: Zone 50

Codes	1	2	3	4	5	6
Label	1	2	3	4	5	6

651 Zone Label: Zone 51

Codes	1	2	3	4	5	6
Label	1	2	3	4	5	6

652 Zone Label: Zone 52

Codes	1	2	3	4	5	6
Label	1	2	3	4	5	6

653 Zone Label: Zone 53

Codes	1	2	3	4	5	6
Label	1	2	3	4	5	6

654 Zone Label: Zone 54

Codes	1	2	3	4	5	6
Label	1	2	3	4	5	6

655 Zone Label: Zone 55

Code	Label	Code	Label	Code	Label	Code	Label	Code	Label	Code	Label
1	1	2	2	3	3	4	4	5	5	6	6
7	7	8	8	9	9	10	10	11	11	12	12
13	13	14	14	15	15	16	16	17	17	18	18
19	19	20	20	21	21	22	22	23	23	24	24
25	25	26	26	27	27	28	28	29	29	30	30
31	31	32	32	33	33	34	34	35	35	36	36
37	37	38	38	39	39	40	40	41	41	42	42
43	43	44	44	45	45	46	46	47	47	48	48
49	49	50	50	51	51	52	52	53	53	54	54
55	55	56	56	57	57	58	58	59	59	60	60
61	61	62	62	63	63	64	64	65	65	66	66
67	67	68	68	69	69	70	70	71	71	72	72
73	73	74	74	75	75	76	76	77	77	78	78
79	79	80	80	81	81	82	82	83	83	84	84
85	85	86	86	87	87	88	88	89	89	90	90
91	91	92	92	93	93	94	94	95	95	96	96
97	97	98	98	99	99	100	100	101	101	102	102
103	103	104	104	105	105	106	106	107	107	108	108
109	109	110	110	111	111	112	112	113	113	114	114
115	115	116	116	117	117	118	118	119	119	120	120
121	121	122	122	123	123	124	124	125	125	126	126
127	127	128	128	129	129	130	130	131	131	132	132
133	133	134	134	135	135	136	136	137	137	138	138
139	139	140	140	141	141	142	142	143	143	144	144
145	145	146	146	147	147	148	148	149	149	150	150
151	151	152	152	153	153	154	154	155	155	156	156
157	157	158	158	159	159	160	160	161	161	162	162
163	163	164	164	165	165	166	166	167	167	168	168
169	169	170	170	171	171	172	172	173	173	174	174
175	175	176	176	177	177	178	178	179	179	180	180
181	181	182	182	183	183	184	184	185	185	186	186
187	187	188	188	189	189	190	190	191	191	192	192
193	193	194	194	195	195	196	196	197	197	198	198
199	199	200	200	201	201	202	202	203	203	204	204
205	205	206	206	207	207	208	208	209	209	210	210
211	211	212	212	213	213	214	214	215	215	216	216
217	217	218	218	219	219	220					

656 Zone Label: Zone 56

Codes	_____	_____	_____	_____	_____	_____
Label	_____	_____	_____	_____	_____	_____

657 Zone Label: Zone 57

[illegible]

658 Zone Label: Zone 58

Codes	_____	_____	_____	_____	_____	_____
Label	_____	_____	_____	_____	_____	_____

659 Zone Label: Zone 59

Codes	1	2	3	4	5	6
Label	1	2	3	4	5	6

660 Zone Label: Zone 60

Codes	1	2	3	4	5	6
Label	1	2	3	4	5	6

661 Zone Label: Zone 61

Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

662 Zone Label: Zone 62

Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

663 Zone Label: Zone 63

Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

664 Zone Label: Zone 64

Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

665 Zone Label: Zone 65

Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

666 Zone Label: Zone 66

Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

667 Zone Label: Zone 67

Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

668 Zone Label: Zone 68

Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

669 Zone Label: Zone 69

Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

670 Zone Label: Zone 70

Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

671 Zone Label: Zone 71

Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

672 Zone Label: Zone 72

Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

673 Zone Label: Zone 73

Codes

--	--	--	--

--	--	--	--

--	--	--	--

--	--	--	--

--	--	--	--

--	--	--	--

Label

--	--	--	--

--	--	--	--

--	--	--	--

--	--	--	--

--	--	--	--

--	--	--	--

674 Zone Label: Zone 74

Codes

--	--	--	--

--	--	--	--

--	--	--	--

--	--	--	--

--	--	--	--

--	--	--	--

Label

--	--	--	--

--	--	--	--

--	--	--	--

--	--	--	--

--	--	--	--

--	--	--	--

675 Zone Label: Zone 75

Codes

--	--	--	--

--	--	--	--

--	--	--	--

--	--	--	--

--	--	--	--

--	--	--	--

Label

--	--	--	--

--	--	--	--

--	--	--	--

--	--	--	--

--	--	--	--

--	--	--	--

676 Zone Label: Zone 76

Codes

--	--	--	--

--	--	--	--

--	--	--	--

--	--	--	--

--	--	--	--

--	--	--	--

Label

--	--	--	--

--	--	--	--

--	--	--	--

--	--	--	--

--	--	--	--

--	--	--	--

677 Zone Label: Zone 76

Codes

--	--	--	--

--	--	--	--

--	--	--	--

--	--	--	--

--	--	--	--

--	--	--	--

Label

--	--	--	--

--	--	--	--

--	--	--	--

--	--	--	--

--	--	--	--

--	--	--	--

678 Zone Label: Zone 78

Codes

--	--	--	--

--	--	--	--

--	--	--	--

--	--	--	--

--	--	--	--

--	--	--	--

Label

--	--	--	--

--	--	--	--

--	--	--	--

--	--	--	--

--	--	--	--

--	--	--	--

679 Zone Label: Zone 79

Codes

--	--	--	--

--	--	--	--

--	--	--	--

--	--	--	--

--	--	--	--

--	--	--	--

Label

--	--	--	--

--	--	--	--

--	--	--	--

--	--	--	--

--	--	--	--

--	--	--	--

680 Zone Label: Zone 80

Codes

--	--	--	--

--	--	--	--

--	--	--	--

--	--	--	--

--	--	--	--

--	--	--	--

Label

--	--	--	--

--	--	--	--

--	--	--	--

--	--	--	--

--	--	--	--

--	--	--	--

681 Zone Label: Zone 81

Codes

--	--	--	--

--	--	--	--

--	--	--	--

--	--	--	--

--	--	--	--

--	--	--	--

Label

--	--	--	--

--	--	--	--

--	--	--	--

--	--	--	--

--	--	--	--

--	--	--	--

682 Zone Label: Zone 82

Codes

--	--	--	--

--	--	--	--

--	--	--	--

--	--	--	--

--	--	--	--

--	--	--	--

Label

--	--	--	--

--	--	--	--

--	--	--	--

--	--	--	--

--	--	--	--

--	--	--	--

683 Zone Label: Zone 83

Codes

--	--	--	--

--	--	--	--

--	--	--	--

--	--	--	--

--	--	--	--

--	--	--	--

Label

--	--	--	--

--	--	--	--

--	--	--	--

--	--	--	--

--	--	--	--

--	--	--	--

684 Zone Label: Zone 84

Codes

--	--	--	--

--	--	--	--

--	--	--	--

--	--	--	--

--	--	--	--

--	--	--	--

Label

--	--	--	--

--	--	--	--

--	--	--	--

--	--	--	--

--	--	--	--

--	--	--	--

685 Zone Label: Zone 85Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

686 Zone Label: Zone 86Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

687 Zone Label: Zone 87Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

688 Zone Label: Zone 88Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

689 Zone Label: Zone 89Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

690 Zone Label: Zone 90Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

691 Zone Label: Zone 91Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

692 Zone Label: Zone 92Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

693 Zone Label: Zone 93Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

694 Zone Label: Zone 94Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

695 Zone Label: Zone 95Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

696 Zone Label: Zone 96Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

697 Zone Label: Zone 97

Codes

Label

698 Zone Label: Zone 98

Codes

Label

699 Zone Label: Zone 99

Codes

Label

700 Zone Label: Zone 100

Codes

Label

701 Zone Label: Zone 101

Codes

Label

702 Zone Label: Zone 102

Codes

Label

703 Zone Label: Zone 103

Codes

Label

704 Zone Label: Zone 104

Codes

Label

705 Zone Label: Zone 105

Codes

Label

706 Zone Label: Zone 106

Codes

Label

707 Zone Label: Zone 107

Codes

Label

708 Zone Label: Zone 108

Codes

Label

709 Zone Label: Zone 109

Codes

Label

710 Zone Label: Zone 110

Codes

Label

711 Zone Label: Zone 111

Codes

Label

712 Zone Label: Zone 112

Codes

Label

713 Zone Label: Zone 113

Codes

Label

714 Zone Label: Zone 114

Codes

Label

715 Zone Label: Zone 115

Codes

Label

716 Zone Label: Zone 116

Codes

Label

717 Zone Label: Zone 117

Codes

Label

718 Zone Label: Zone 118

Codes

Label

719 Zone Label: Zone 119

Codes

Label

720 Zone Label: Zone 120

Codes

Label

721 Zone Label: Zone 121

Codes

Label

722 Zone Label: Zone 122

Codes

Label

723 Zone Label: Zone 123

Codes

Label

724 Zone Label: Zone 124

Codes

Label

725 Zone Label: Zone 125

Codes

Label:

726 Zone Label: Zone 126

Codes

Label

727 Zone Label: Zone 127

Codes

Label

728 Zone Label: Zone 128

Codes

Label:

Appendix 1: X-10 House Code and Unit Numbers

<i>Enter</i>	<i>X-10 Code</i>	<i>Enter</i>	<i>X-10 Code</i>	<i>Enter</i>	<i>X-10 Code</i>	<i>Enter</i>	<i>X-10 Code</i>	<i>Enter</i>	<i>X-10 Code</i>
[000]	A 1	[052]	D 5	[104]	G 9	[156]	J 13	[208]	N 1
[001]	A 2	[053]	D 6	[105]	G 10	[157]	J 14	[209]	N 2
[002]	A 3	[054]	D 7	[106]	G 11	[158]	J 15	[210]	N 3
[003]	A 4	[055]	D 8	[107]	G 12	[159]	J 16	[211]	N 4
[004]	A 5	[056]	D 9	[108]	G 13	[160]	K 1	[212]	N 5
[005]	A 6	[057]	D 10	[109]	G 14	[161]	K 2	[213]	N 6
[006]	A 7	[058]	D 11	[110]	G 15	[162]	K 3	[214]	N 7
[007]	A 8	[059]	D 12	[111]	G 16	[163]	K 4	[215]	N 8
[008]	A 9	[060]	D 13	[112]	H 1	[164]	K 5	[216]	N 9
[009]	A 10	[061]	D 14	[113]	H 2	[165]	K 6	[217]	N 10
[010]	A 11	[062]	D 15	[114]	H 3	[166]	K 7	[218]	N 11
[011]	A 12	[063]	D 16	[115]	H 4	[167]	K 8	[219]	N 12
[012]	A 13	[064]	E 1	[116]	H 5	[168]	K 9	[220]	N 13
[013]	A 14	[065]	E 2	[117]	H 6	[169]	K 10	[221]	N 14
[014]	A 15	[066]	E 3	[118]	H 7	[170]	K 11	[222]	N 15
[015]	A 16	[067]	E 4	[119]	H 8	[171]	K 12	[223]	N 16
[016]	B 1	[068]	E 5	[120]	H 9	[172]	K 13	[224]	O 1
[017]	B 2	[069]	E 6	[121]	H 10	[173]	K 14	[225]	O 2
[018]	B 3	[070]	E 7	[122]	H 11	[174]	K 15	[226]	O 3
[019]	B 4	[071]	E 8	[123]	H 12	[175]	K 16	[227]	O 4
[020]	B 5	[072]	E 9	[124]	H 13	[176]	L 1	[228]	O 5
[021]	B 6	[073]	E 10	[125]	H 14	[177]	L 2	[229]	O 6
[022]	B 7	[074]	E 11	[126]	H 15	[178]	L 3	[230]	O 7
[023]	B 8	[075]	E 12	[127]	H 16	[179]	L 4	[231]	O 8
[024]	B 9	[076]	E 13	[128]	I 1	[180]	L 5	[232]	O 9
[025]	B 10	[077]	E 14	[129]	I 2	[181]	L 6	[233]	O 10
[026]	B 11	[078]	E 15	[130]	I 3	[182]	L 7	[234]	O 11
[027]	B 12	[079]	E 16	[131]	I 4	[183]	L 8	[235]	O 12
[028]	B 13	[080]	F 1	[132]	I 5	[184]	L 9	[236]	O 13
[029]	B 14	[081]	F 2	[133]	I 6	[185]	L 10	[237]	O 14
[030]	B 15	[082]	F 3	[134]	I 7	[186]	L 11	[238]	O 15
[031]	B 16	[083]	F 4	[135]	I 8	[187]	L 12	[239]	O 16
[032]	C 1	[084]	F 5	[136]	I 9	[188]	L 13	[240]	P 1
[033]	C 2	[085]	F 6	[137]	I 10	[189]	L 14	[241]	P 2
[034]	C 3	[086]	F 7	[138]	I 11	[190]	L 15	[242]	P 3
[035]	C 4	[087]	F 8	[139]	I 12	[191]	L 16	[243]	P 4
[036]	C 5	[088]	F 9	[140]	I 13	[192]	M 1	[244]	P 5
[037]	C 6	[089]	F 10	[141]	I 14	[193]	M 2	[245]	P 6
[038]	C 7	[090]	F 11	[142]	I 15	[194]	M 3	[246]	P 7
[039]	C 8	[091]	F 12	[143]	I 16	[195]	M 4	[247]	P 8
[040]	C 9	[092]	F 13	[144]	J 1	[196]	M 5	[248]	P 9
[041]	C 10	[093]	F 14	[145]	J 2	[197]	M 6	[249]	P 10
[042]	C 11	[094]	F 15	[146]	J 3	[198]	M 7	[250]	P 11
[043]	C 12	[095]	F 16	[147]	J 4	[199]	M 8	[251]	P 12
[044]	C 13	[096]	G 1	[148]	J 5	[200]	M 9	[252]	P 13
[045]	C 14	[097]	G 2	[149]	J 6	[201]	M 10	[253]	P 14
[046]	C 15	[098]	G 3	[150]	J 7	[202]	M 11	[254]	P 15
[047]	C 16	[099]	G 4	[151]	J 8	[203]	M 12	[255]	P 16
[048]	D 1	[100]	G 5	[152]	J 9	[204]	M 13		
[049]	D 2	[101]	G 6	[153]	J 10	[205]	M 14		
[050]	D 3	[102]	G 7	[154]	J 11	[206]	M 15		
[051]	D 4	[103]	G 8	[155]	J 12	[207]	M 16		

Appendix 2: Word Library

[000] Number Command 1: Combined Form

[001] Number Command 2: Ordered Form

[002] Number Command 3: Individual Numbers

[003] Access	[052] Dark	[101] Ground	[150] Mode	[199] Silent
[004] Air-conditioning	[053] Day	[102] Guard	[151] Motion	[200] Skylight
[005] Alcove	[054] Deck	[103] Guest	[152] Night	[201] Sliding
[006] And	[055] Degrees	[104] Gun	[153] North	[202] Smoke
[007] Apartment	[056] Den	[105] Gym	[154] Number	[203] Solarium
[008] Appliance	[057] Detector	[106] Hallway	[155] Nursery	[204] Sounder
[009] Area	[058] Dining	[107] Heat	[156] Office	[205] South
[010] Atrium	[059] Dishwasher	[108] Heater	[157] Outlet	[206] Sprinkler
[011] Attic	[060] Door	[109] Hlgh	[158] Over	[207] Staff
[012] Automatic	[061] Down	[110] Holiday	[159] Overflow	[208] Stairs
[013] Away	[062] Driveway	[111] Home	[160] Overhead	[209] Stereo
[014] Back	[063] East	[112] Hose	[161] Panel	[210] Stock
[015] Backyard	[064] Electric	[113] Hot tub	[162] Panic-button	[211] Storage
[016] Balcony	[065] Elevator	[114] House	[163] Parking	[212] Strike
[017] Bar	[066] Employee	[115] Humidity	[164] Partition	[213] Sump
[018] Barn	[067] Energy-save	[116] Interior	[165] Patio	[214] Supervision
[019] Basement	[068] Entertainment	[117] intrusion	[166] Perimeter	[215] Swimming-pool
[020] Bathroom	[069] Entry	[118] Item	[167] Photocopier	[216] Tamper
[021] Bay	[070] Equipment	[119] Jewelry	[168] Picture	[217] Television
[022] Beam	[071] Exercise	[120] Kitchen	[169] Place	[218] Temperature
[023] Bedroom	[072] Exhaust	[121] Laboratory	[170] Play	[219] Time
[024] Blinds	[073] Exit	[122] Ladies	[171] Porch	[220] Tool
[025] Boat	[074] Exterior	[123] Lamp	[172] Portable	[221] Top
[026] Boiler	[075] Extinguisher	[124] Landscape	[173] Power	[222] Track
[027] Bottom	[076] Factory	[125] Laundry	[174] Pressure	[223] Trap
[028] Boys	[077] Family	[126] Lawn	[175] Proximity	[224] Under
[029] Building	[078] Fan	[127] Left	[176] Pull-station	[225] Unit
[030] Cabinet	[079] Fence	[128] Level	[177] Pump	[226] Up
[031] Cafeteria	[080] File	[129] Library	[178] Ramp	[227] Upper
[032] Camera	[081] Fire	[130] Light	[179] Rear	[228] Utility
[033] Carport	[082] Floor	[131] Lights	[180] Receiving	[229] Vacuum
[034] Cash	[083] Florida	[132] Liquor	[181] Recreation	[230] Vault
[035] Ceiling	[084] Flow	[133] Living	[182] Refrigerator	[231] Vent
[036] Center	[085] Fluid	[134] Loading	[183] Reset	[232] Vibration
[037] Changeroom	[086] Foil	[135] Lobby	[184] Restricted	[233] Walkway
[038] China	[087] Fountain	[136] Lot	[185] Restroom	[234] Warehouse
[039] Chute	[088] Foyer	[137] Low	[186] Right	[235] Washroom
[040] Circuit	[089] Freezer	[138] Lower	[187] Roof	[236] Water
[041] Classroom	[090] French	[139] Machine	[188] Room	[237] Weekend
[042] Coatroom	[091] Front	[140] Maids	[189] Safe	[238] Well
[043] Coffee-maker	[092] Furnace	[141] Mail	[190] Sauna	[239] West
[044] Cold	[093] Game	[142] Main	[191] Schedule	[240] Window
[045] Collection	[094] Garage	[143] Maintenance	[192] Sensor	[241] Wine-cellar
[046] Compressor	[095] Garbage	[144] Master	[193] Service	[242] Work
[047] Computer	[096] Gas	[145] Mat	[194] Shed	[243] Yard
[048] Contact	[097] Gate	[146] Medical	[195] Shipping	[244] Zone
[049] Control	[098] Girls	[147] Meeting	[196] Shop	[245] (2 s Pause)
[050] Crawl-space	[099] Glassbreak	[148] Men's	[197] Shutter	
[051] Curtain	[100] Greenhouse	[149] Middle	[198] Side	