

# MODULE RELAY LATCHING DLR-12

**ATI Security**

1034 Kiel Court,  
Sunnyvale, California 94085

## SPECIFICATIONS


Operating Voltage: 6 or 12 volts DC.

Contact Rating: 3 amps, resistive.

## INSTALLATION

1. The DLR-12 is typically located at the Control Panel.
2. Observe polarity on the red and black leads. Red (+), Black (-)
3. If the DLR-12 fails to operate: CHECK - voltage polarity; CHECK - operation of relay contacts by manually applying voltage to the red and black leads from a battery. Don't rely on the click of the relay to verify that the contacts are working, check the contacts with an ohm meter.

## WIRING INFORMATION

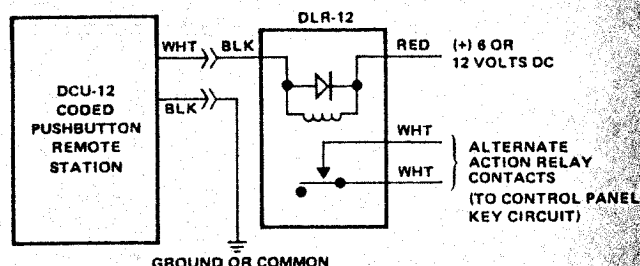

## OPERATION

The DLR-12 Latching Relay provides an "Alternate Action" type of contact switching interface between the DCU-12 Coded Pushbutton Remote Station and a Burglar Alarm Control Panel. The momentary switch closure of the DCU-12 will cause the contacts of the DLR-12 to alternately open and close, thus duplicating the action of a "Shunt" lock. Since the contacts of the DLR-12 are mechanically latched, a power interruption will not cause the contacts to change state.