

® ADEMCO

5804-2
WIRELESS KEY TRANSMITTER

INSTALLATION INSTRUCTIONS

GENERAL INFORMATION

The 5804-2 is a compact, 2-button portable wireless transmitter intended for use only with wireless alarm systems that support 5800 series receivers. Each button on the transmitter may be programmed for any zone response, but is typically used for arming and disarming.

The 5804-2 is powered by two replaceable lithium batteries designed to provide up to 4 years of life. For battery installation, see **Battery Access**.

PROGRAMMING

Each 5804-2 is assigned a unique serial number during manufacture. Each button on the unit also has a distinct "loop" number (refer to Figure 1) that you must program into the control panel during installation. Assign each button to an individual zone and designate the Input Type as "BR" (Button Type RF).

When prompted for the serial number, either press and release the button you are programming twice, or manually enter it through the keypad.

For complete details on how to program the 5804-2 transmitter's serial number at the control panel, see the control unit's installation instructions.

Note: Buttons on this transmitter must be pressed for at least 1/2 second to activate the transmitter. This feature minimizes the possibility of accidental transmissions.


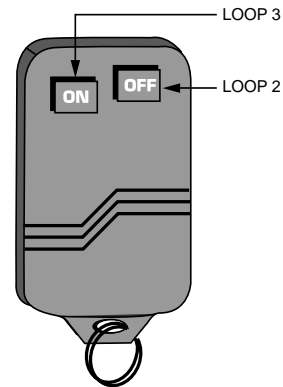


Figure 1: 5804-2 showing button designations

SPECIFICATIONS

Unit Dimensions:

57mm x 38mm x 12.7mm

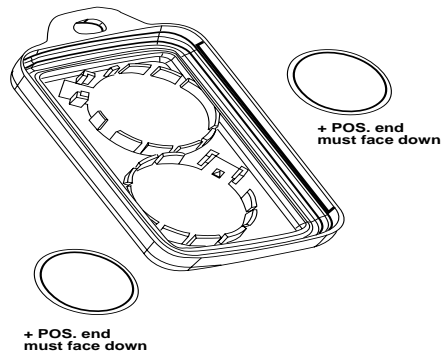

BATTERY ACCESS

Battery:

Maxell CR2025, Duracell DL 2025 or
Varta CR2025

Battery Access:

Remove case back by using the blade of
a small screwdriver to pry open. Place
batteries in case back locations (see
diagram).

+ POS END MUST FACE DOWN.

To close, snap case front and back
together.

Important Note: *Do not remove
Printed Circuit Board.*

REFER TO THE INSTALLATION INSTRUCTIONS FOR THE RECEIVER/CONTROL WITH
WHICH THIS DEVICE IS USED FOR WARRANTY INFORMATION, AND FOR DETAILS
REGARDING THE LIMITATIONS OF THE ENTIRE ALARM SYSTEM.

THIS DEVICE COMPLIES WITH PART 15 OF FCC RULES. OPERATION IS SUBJECT TO THE FOLLOWING
TWO CONDITIONS: (1) THIS DEVICE MAY NOT CAUSE HARMFUL INTERFERENCE, AND (2) THIS DEVICE
MUST ACCEPT ANY INTERFERENCE RECEIVED, INCLUDING INTERFERENCE THAT MAY CAUSE
UNDESIRE OPERATION.

FCC ID: CFS8DL5804

**ADEMCO
GROUP**

165 Eileen Way, Syosset, New York 11791
Copyright © 1999 PITTWAY CORPORATION



N7674-3 5/99